

VRS

SISTEM VERANDE

Provodite više vremena napolju
i uživajte na svežem vazduhu!



Materijal: aluminijum 6063 T5,
nerđajući čelik i delrin.




Izbor RAL boje
Sve boje po vašem izboru,
prema RAL standardu.



Visoka otpornost na kišu,
otopljeni sneg i vetar.



UDOBNOST TOKOM
CELE GODINE

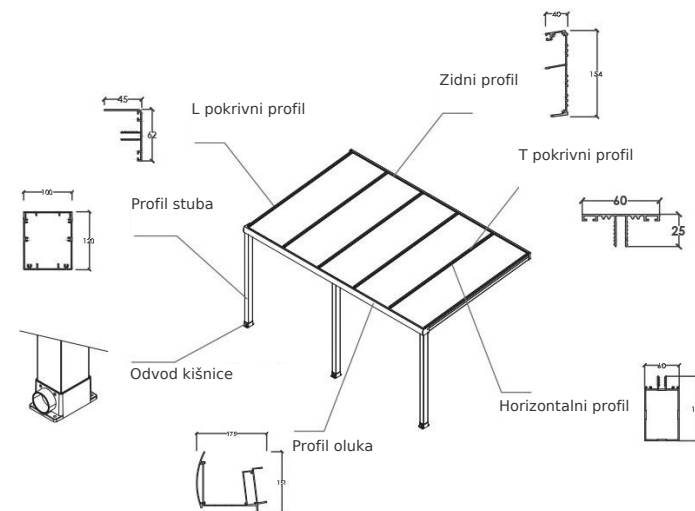


ISPITIVANJE OTPORNOSTI NA VETAR
Ispitano prema UNE-EN 13659:2004, klasa 6,
pri brzini vetra od 112 km/h. Nije utvrđen lom.

ISPITIVANJE OTPORNOSTI NA KIŠU
Prema UNE-EN 12056-3 (najviše 0,03 l/s).
Za fiksni krov: približno 108 l/m² na sat.

ODVOD KIŠNICE
Voda sa krova sakuplja se u profilu oluka,
sprovodi kroz vertikalne stubove i odvodi.

POVRŠINSKA OBRADA
Bojene, eloksirane i površine sa dezenom drveta;
sertifikati Qualicoat, Qualideco i Qualanod.

Garancija na površinsku obradu: 10 godina.

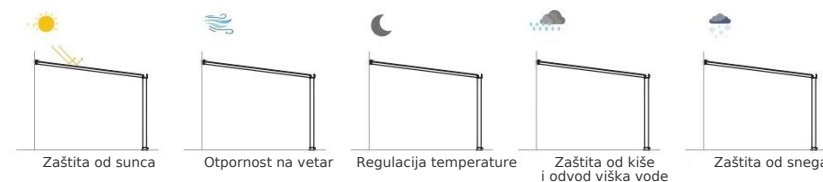



VRS

Sistem verande Veranda System



Materijal
Aluminijum 6063 T5, nerđajući čelik i delrin.

Material
6063 T5 aluminum, stainless steel and delrin.



Izbor RAL boje
Moguće su sve boje
po vašem izboru,
prema RAL standardu.

RAL Color Selection
Coloring of your choice,
according to the
RAL color standard.




**Visoka otpornost na kišu, otopljeni sneg
i vetar.**

**Great resistance to rainy weather conditions,
snow water and wind.**



ALM.A-LX 15841
Masa: 4,24 Kg/m



ALM.A-LX 16064
Masa: 1,80 Kg/m



ALM.A-LX 16065
Masa: 0,48 Kg/m



ALM.A-LX 16066
Masa: 1,86 Kg/m



ALM.A-LX 16067
Masa: 0,51 Kg/m



ALM.A-LX 16091
Masa: 0,67 Kg/m



ALM.A-LX 16907
Masa: 3,12 Kg/m



ALM.A-LX.K4607



ALM.A-LX.K4606



ALM.A-LX.VER.001



ALM.A-LX.VER.002



ALM.A-LX.VER.003



ALM.A-LX.VER.004



ALM.A-LX.VER.005



ALM.A-LX.VER.006



ALM.A-LX.VER.007



ALM.A-LX.VER.008



ALM.A-LX.VER.009



ALM.A-LX.VER.010