




UNUTRAŠNJA VRATA



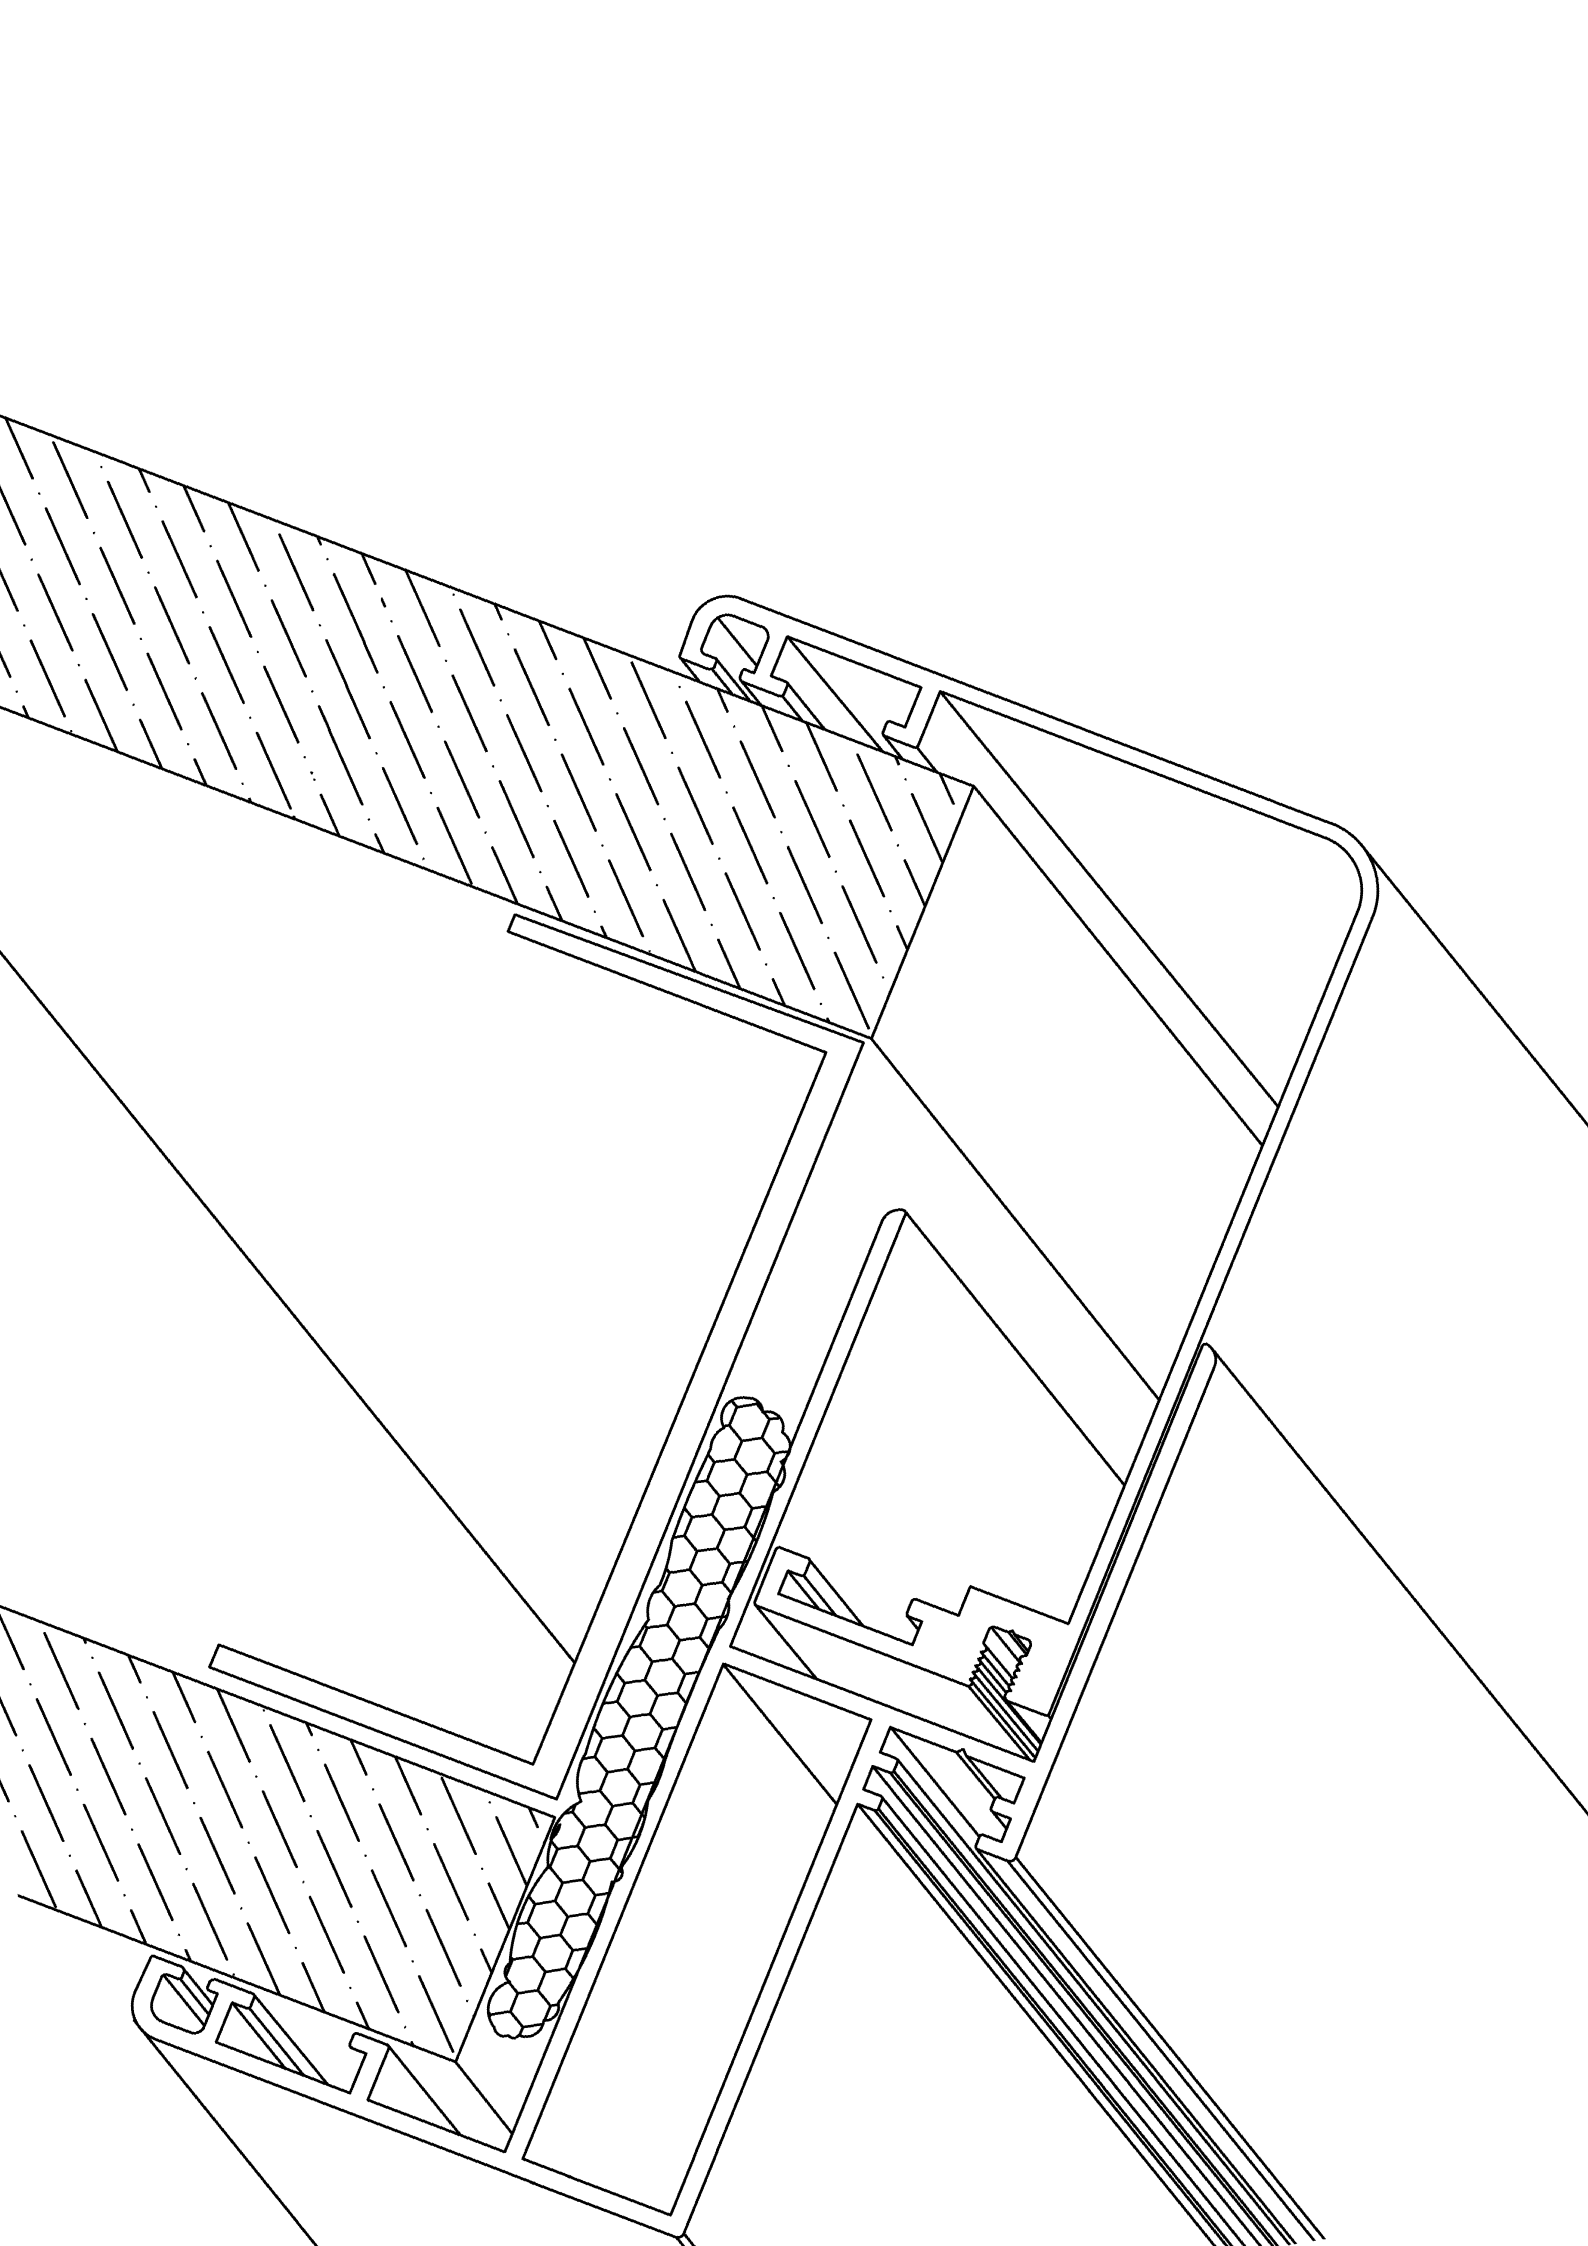


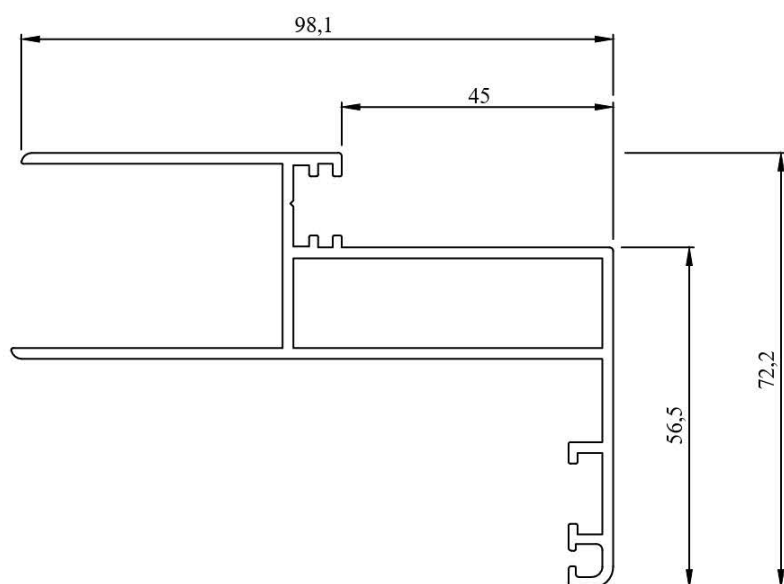


Oznaka/Code: U-6517			
Štok 1,610 kg/m'			
SEČENJE POD UGLOM OD 45°			
	SPOJNICA	ŠIFRA	ŠIRINA
ZA ŠTIPANJE		S 50-14	50mm
MONTAŽNA		MS 15.50	
ZA PERO		U-U SET	

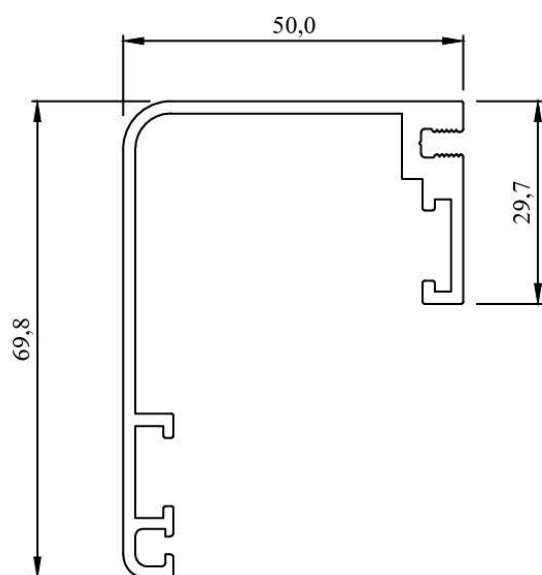


Oznaka/Code: U-6514			
Pervajz 50mm 1.230 kg/m'			
SEČENJE POD UGLOM OD 45°			
	SPOJNICA	ŠIFRA	ŠIRINA
UNUTRA		U-U 2mm	
ZA PERO		U-U SET	

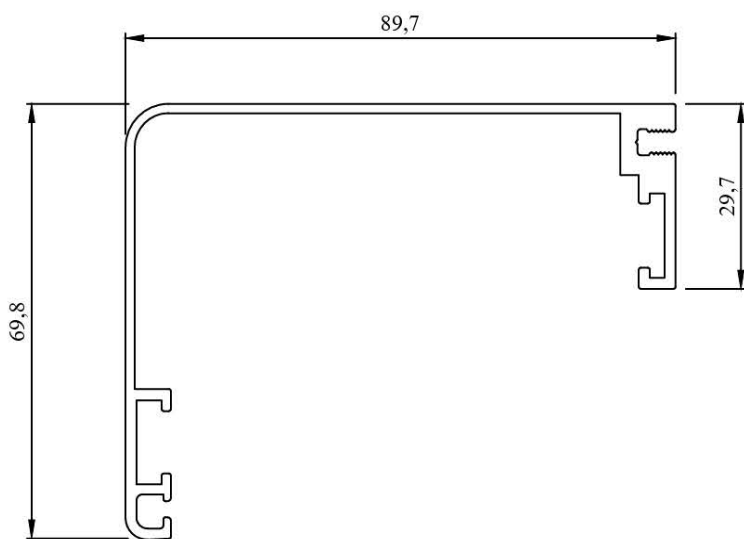


Oznaka/Code: U-11511			
Pervajz 90mm 1.100 kg/m'			
SEČENJE POD UGLOM OD 45°			
	SPOJNICA	ŠIFRA	ŠIRINA
UNUTRA		U-U 2mm	
ZA PERO		U-U SET	

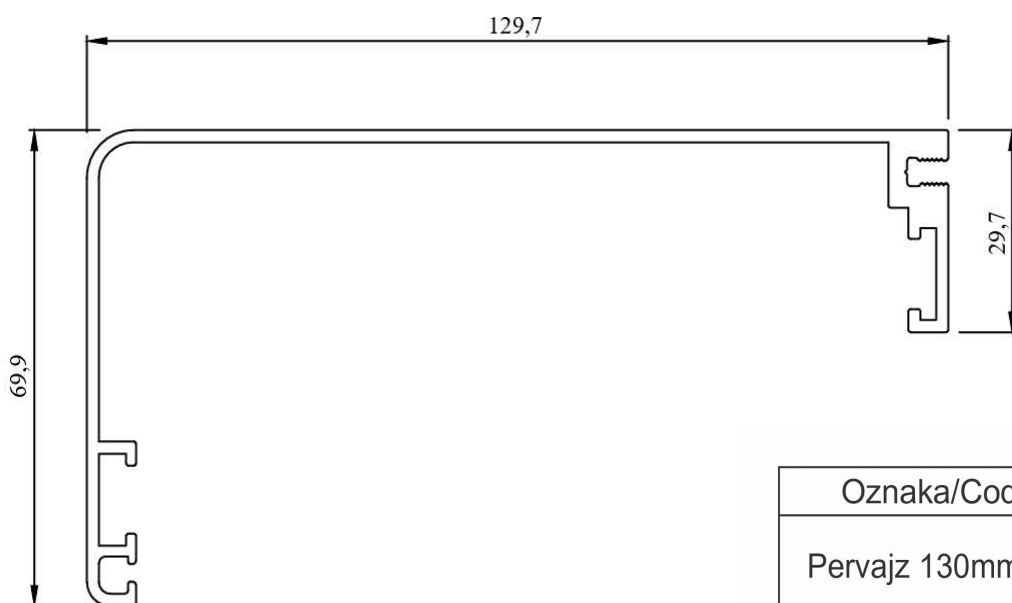


Oznaka/Code: U-6516			
Pervajz 130mm 1.520 kg/m'			
SEČENJE POD UGLOM OD 45°			
	SPOJNICA	ŠIFRA	ŠIRINA
UNUTRA		U-U 2mm	
ZA PERO		U-U SET	

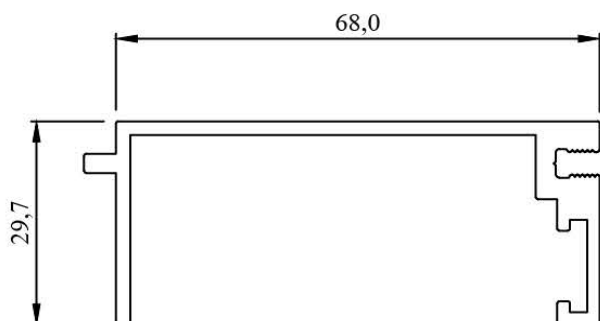


Oznaka/Code: U-10169			
Srednja dopuna 68mm			
0.880 kg/m'			
	SPOJNICA	ŠIFRA	ŠIRINA
UNUTRA		U-U 2mm	

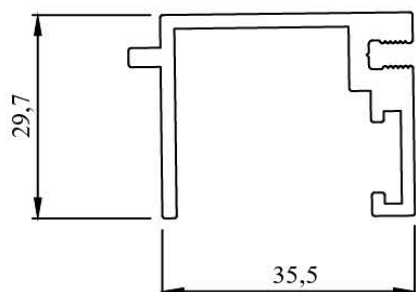


Oznaka/Code: U-12644			
Srednja dopuna 35mm			
0.710 kg/m'			
	SPOJNICA	ŠIFRA	ŠIRINA
UNUTRA		U-U 2mm	

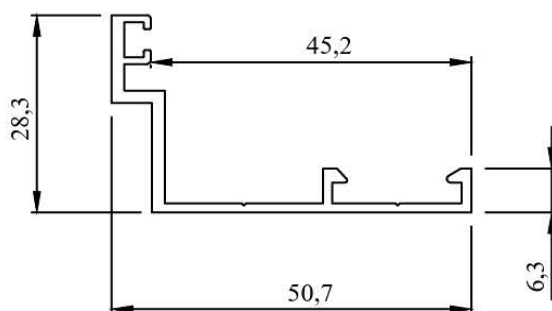


Oznaka/Code: U-12643			
Dopuna štoka za nadsvetlo			
0.400 kg/m'			

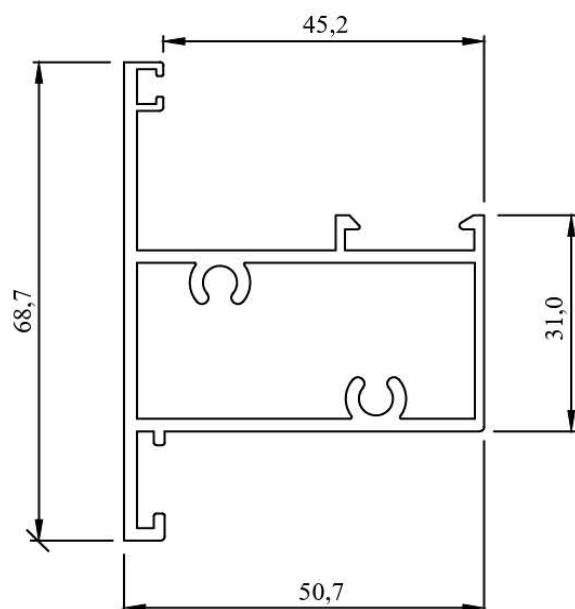

Oznaka/Code: U-12642			
T profil			
1.146 kg/m'			

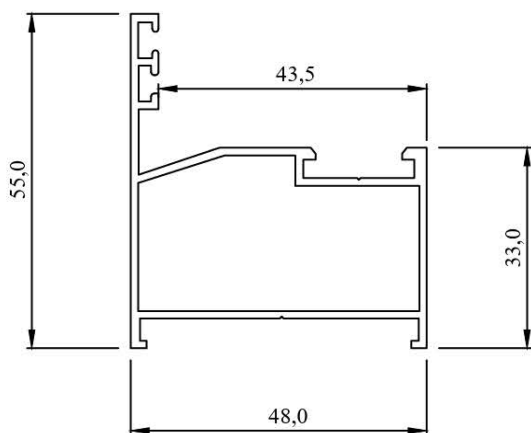


Oznaka/Code: ALH 6210		
Štok		
0.720 kg/m'		
	SPOJNICA	ŠIFRA
ZA UGAO		AL 806SR

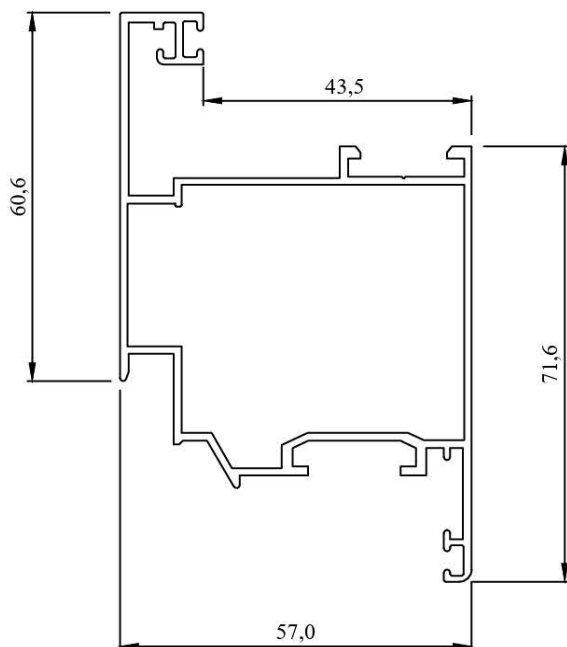


Oznaka/Code: ALH 6225		
Krilo		
1.166 kg/m'		
	SPOJNICA	ŠIFRA
ZA ŠTIPANJE		ALS1115.44 + D 25.2
MONTAŽNA		MS 15.2 + D 25.2


LTS 872
Kit lajsna
0.250 kg/m'





LJS 873
Kit lajsna
0.330 kg/m'





Ugradna dubina	Štok	Pervajz 130	Pervajz 90	Pervajz 50	Dopuna 68mm	Dopuna 30mm
	U-6517	U-6516	U-11511	U-6514	U-10169	U-12644
10-13cm	✓			✓		
13,5-16,5cm	✓		✓			
17,5-20,5cm	✓	✓				
20,5-23,5cm	✓		✓		✓	
24-27cm	✓	✓			✓	
28-31cm	✓	✓			✓	✓
31-34cm	✓	✓			✓ 2 kom.	
34,5-37,5cm	✓	✓			✓ 2 kom.	✓
38-41cm	✓	✓			✓ 3 kom.	

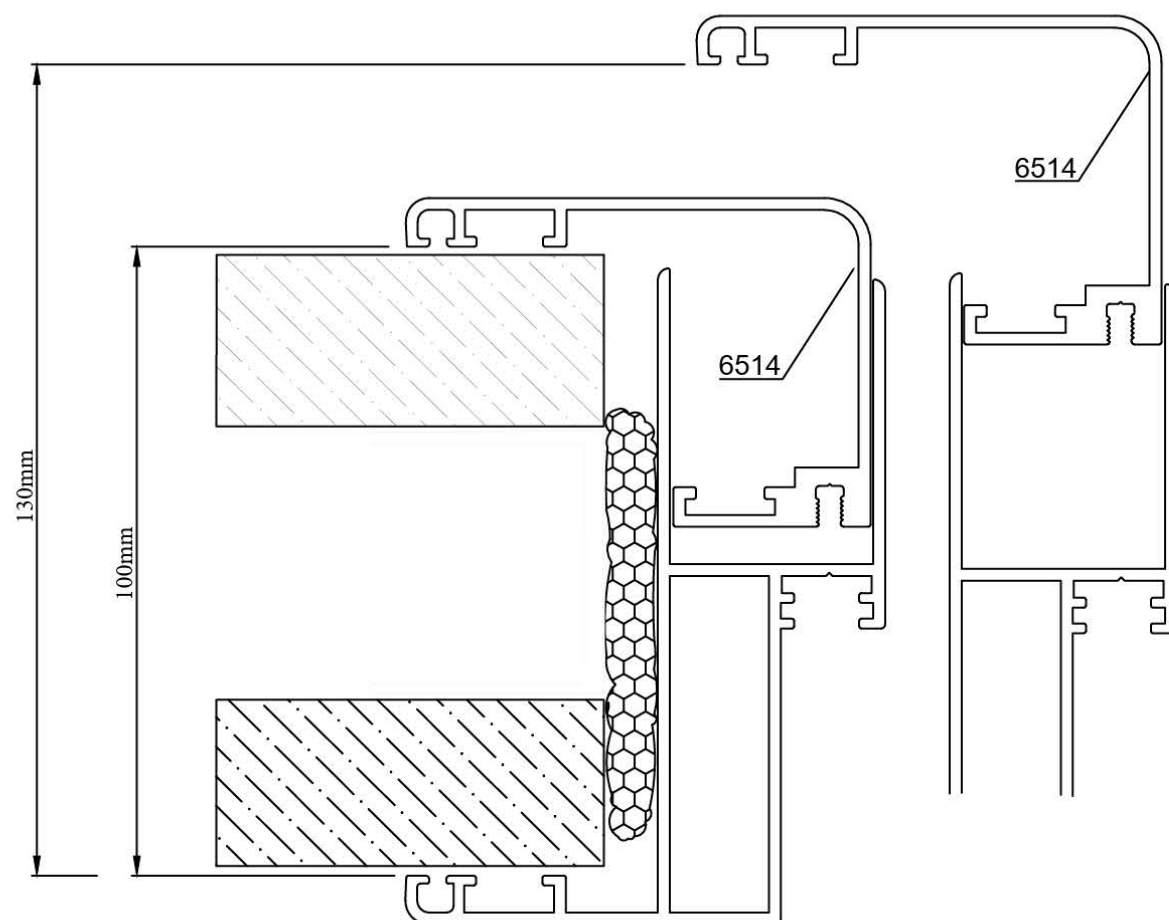


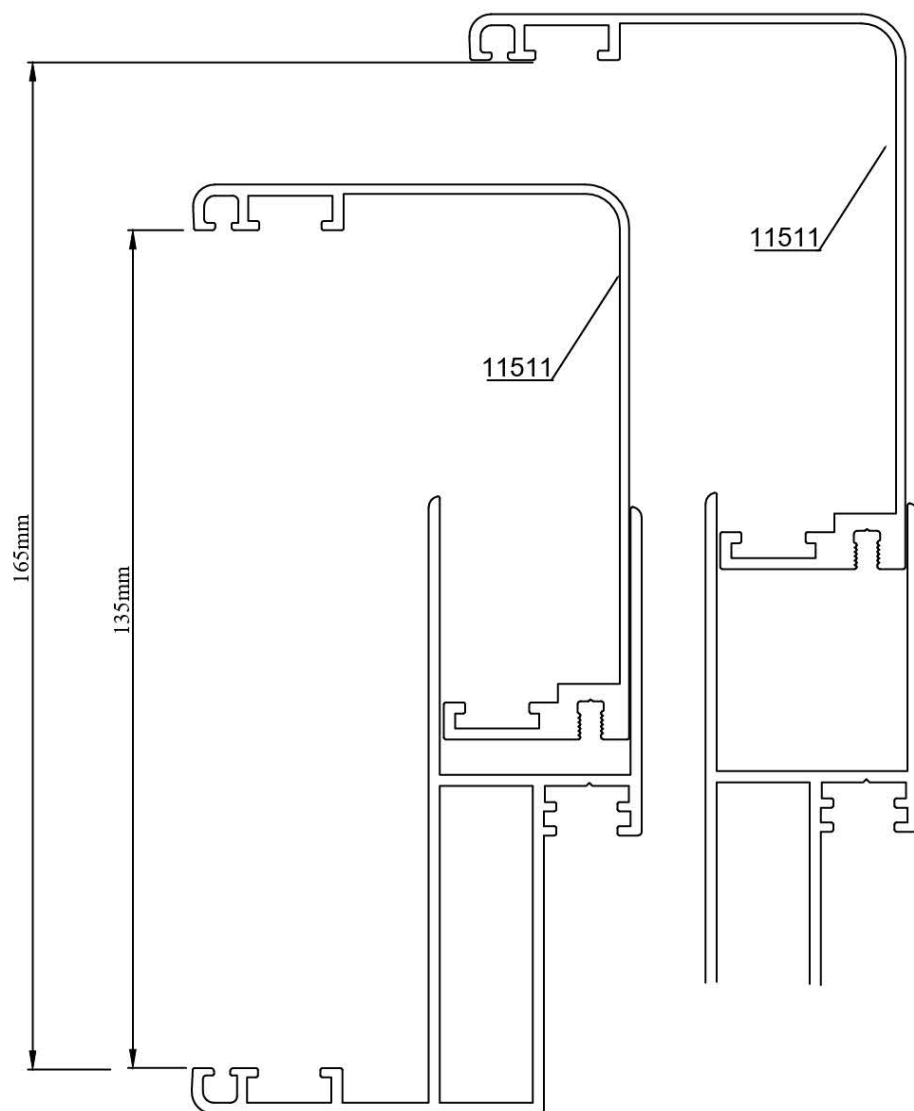


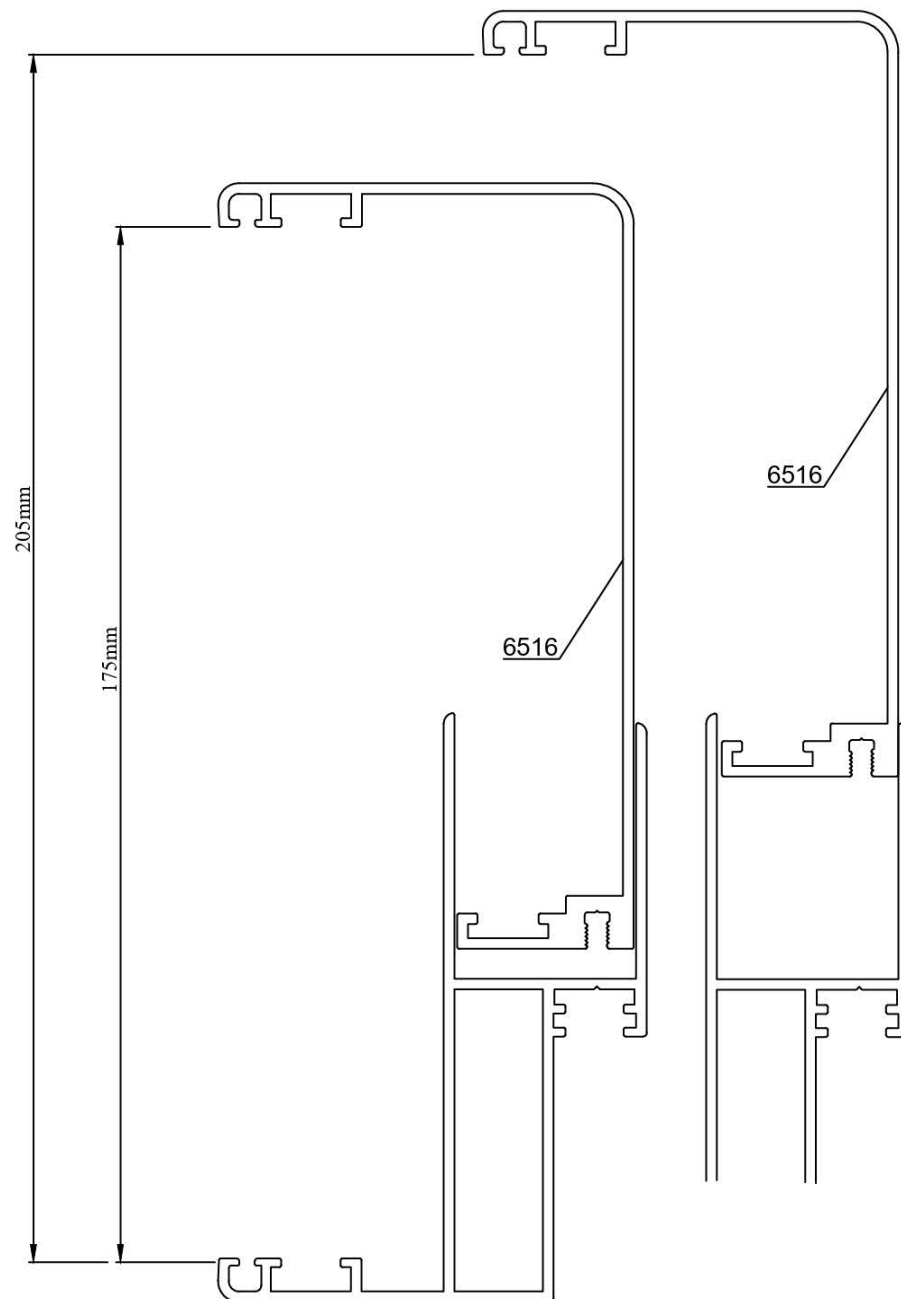


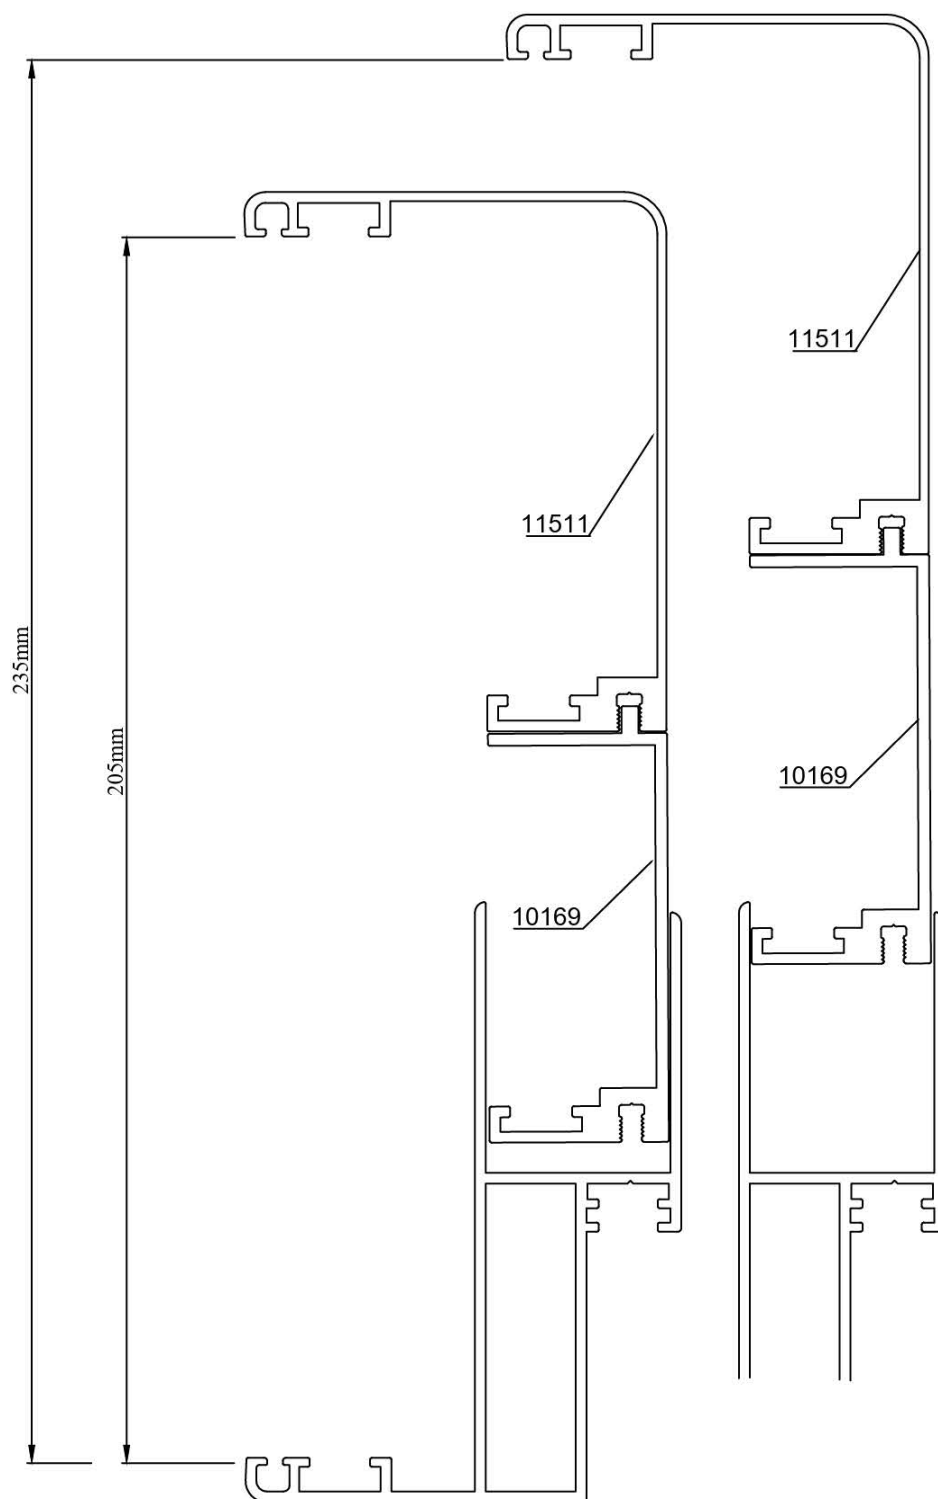


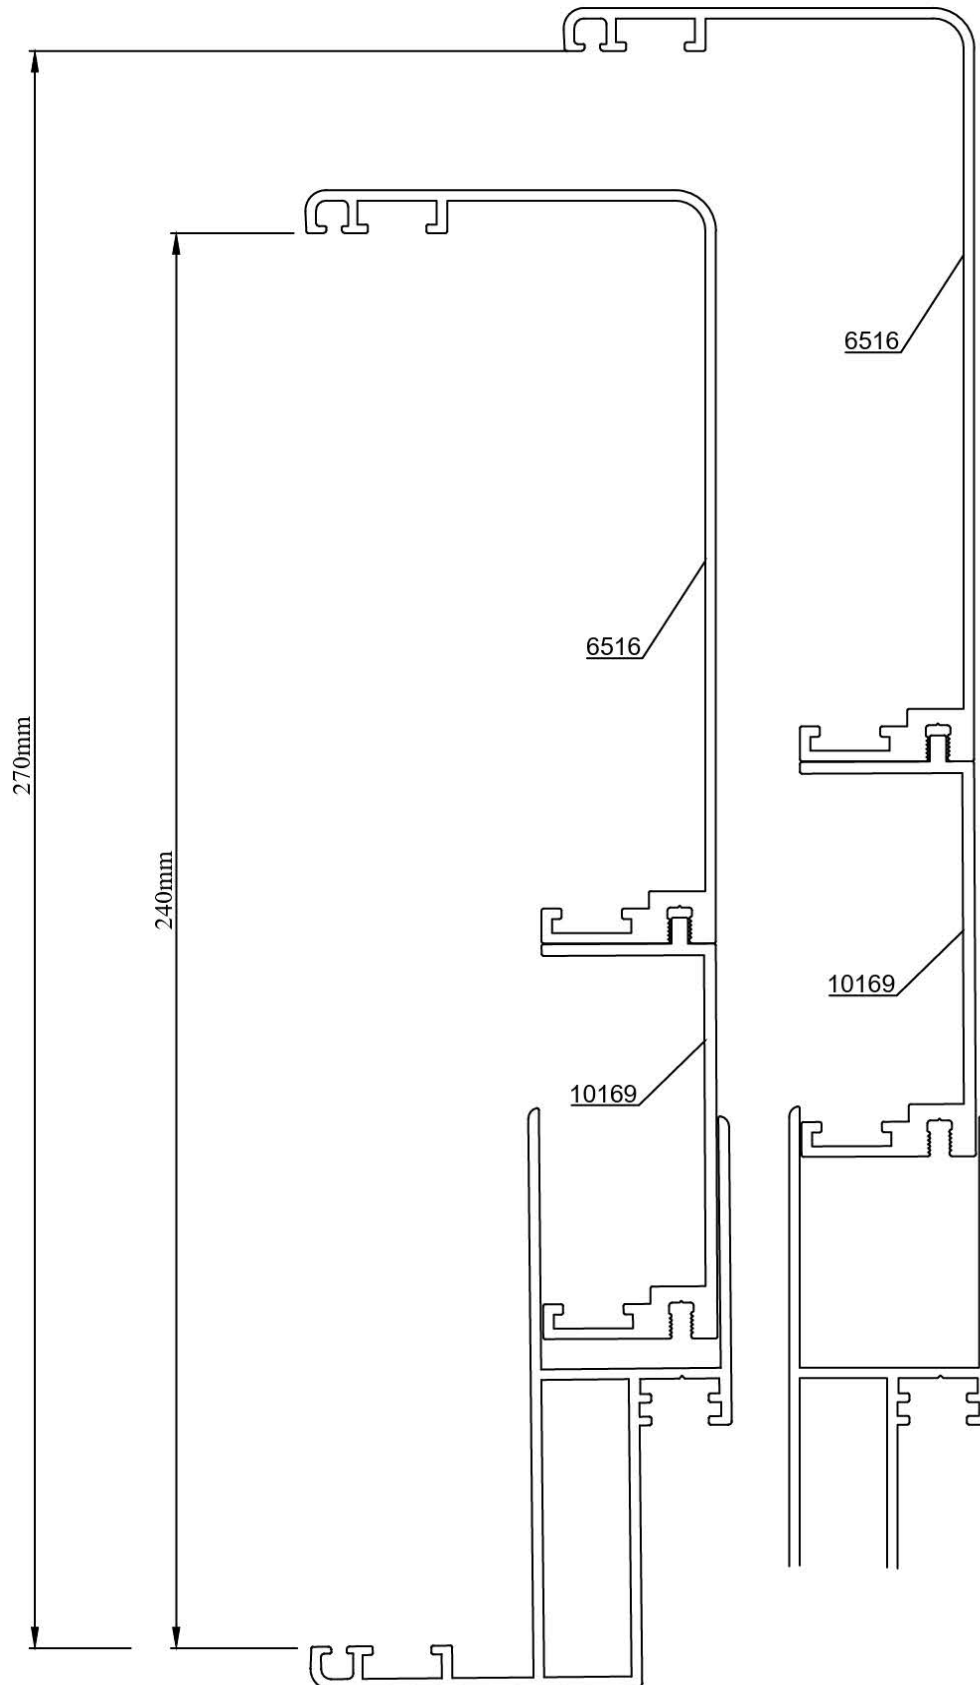


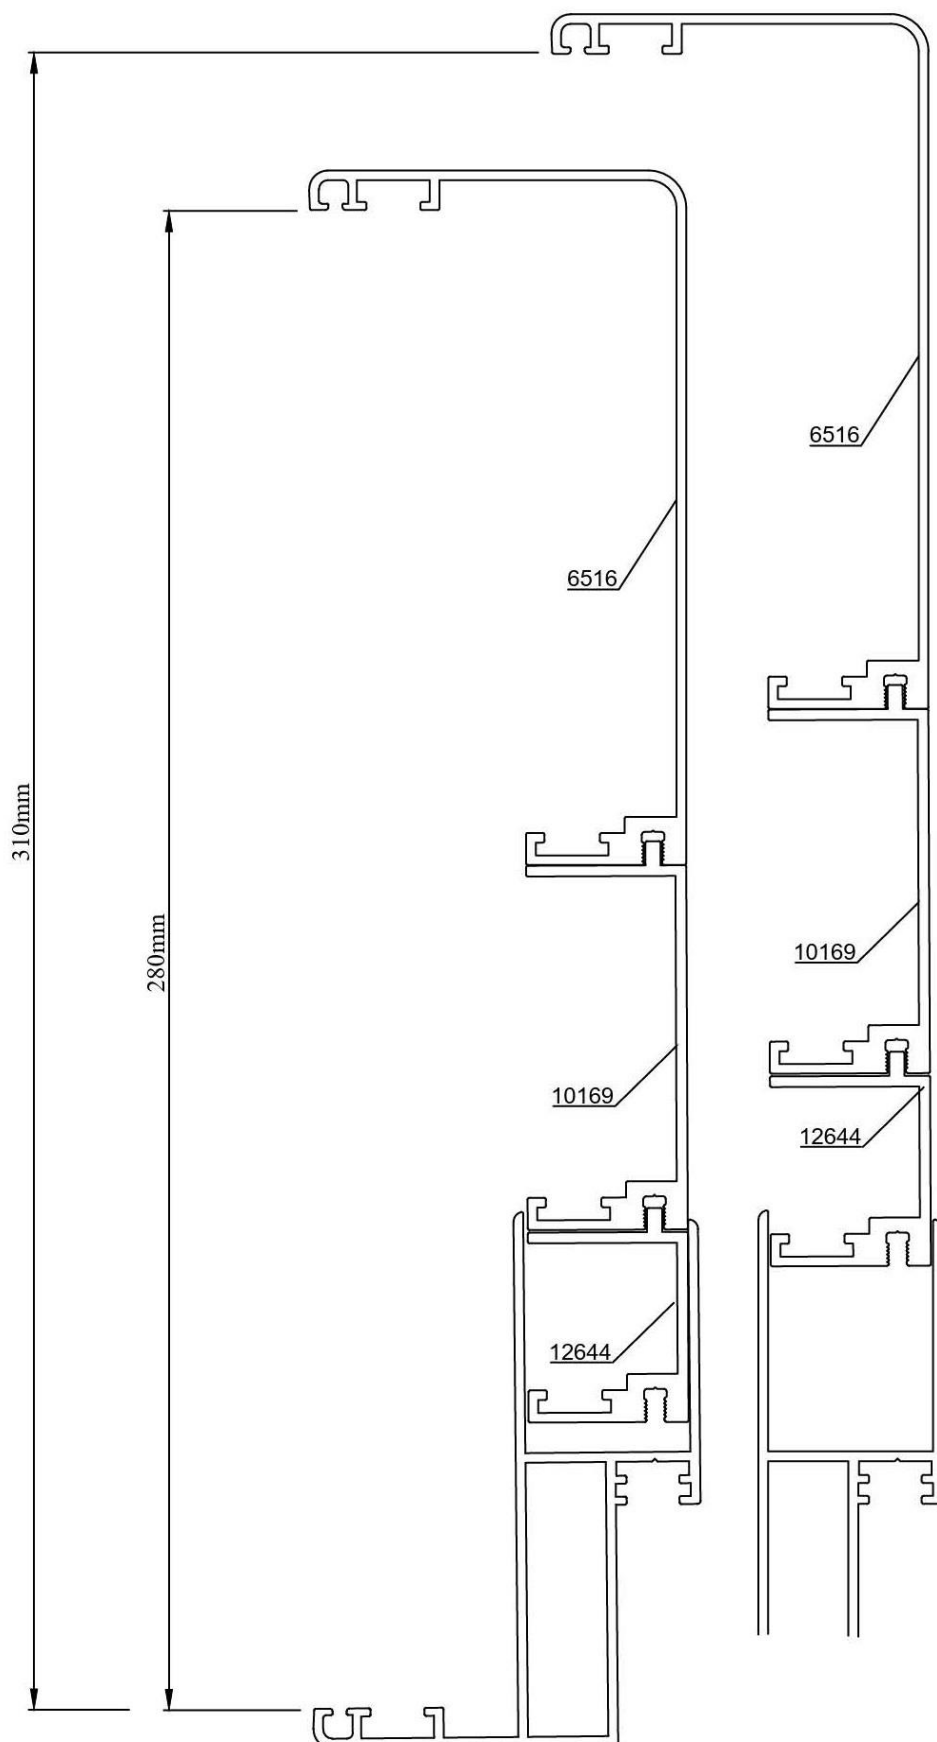


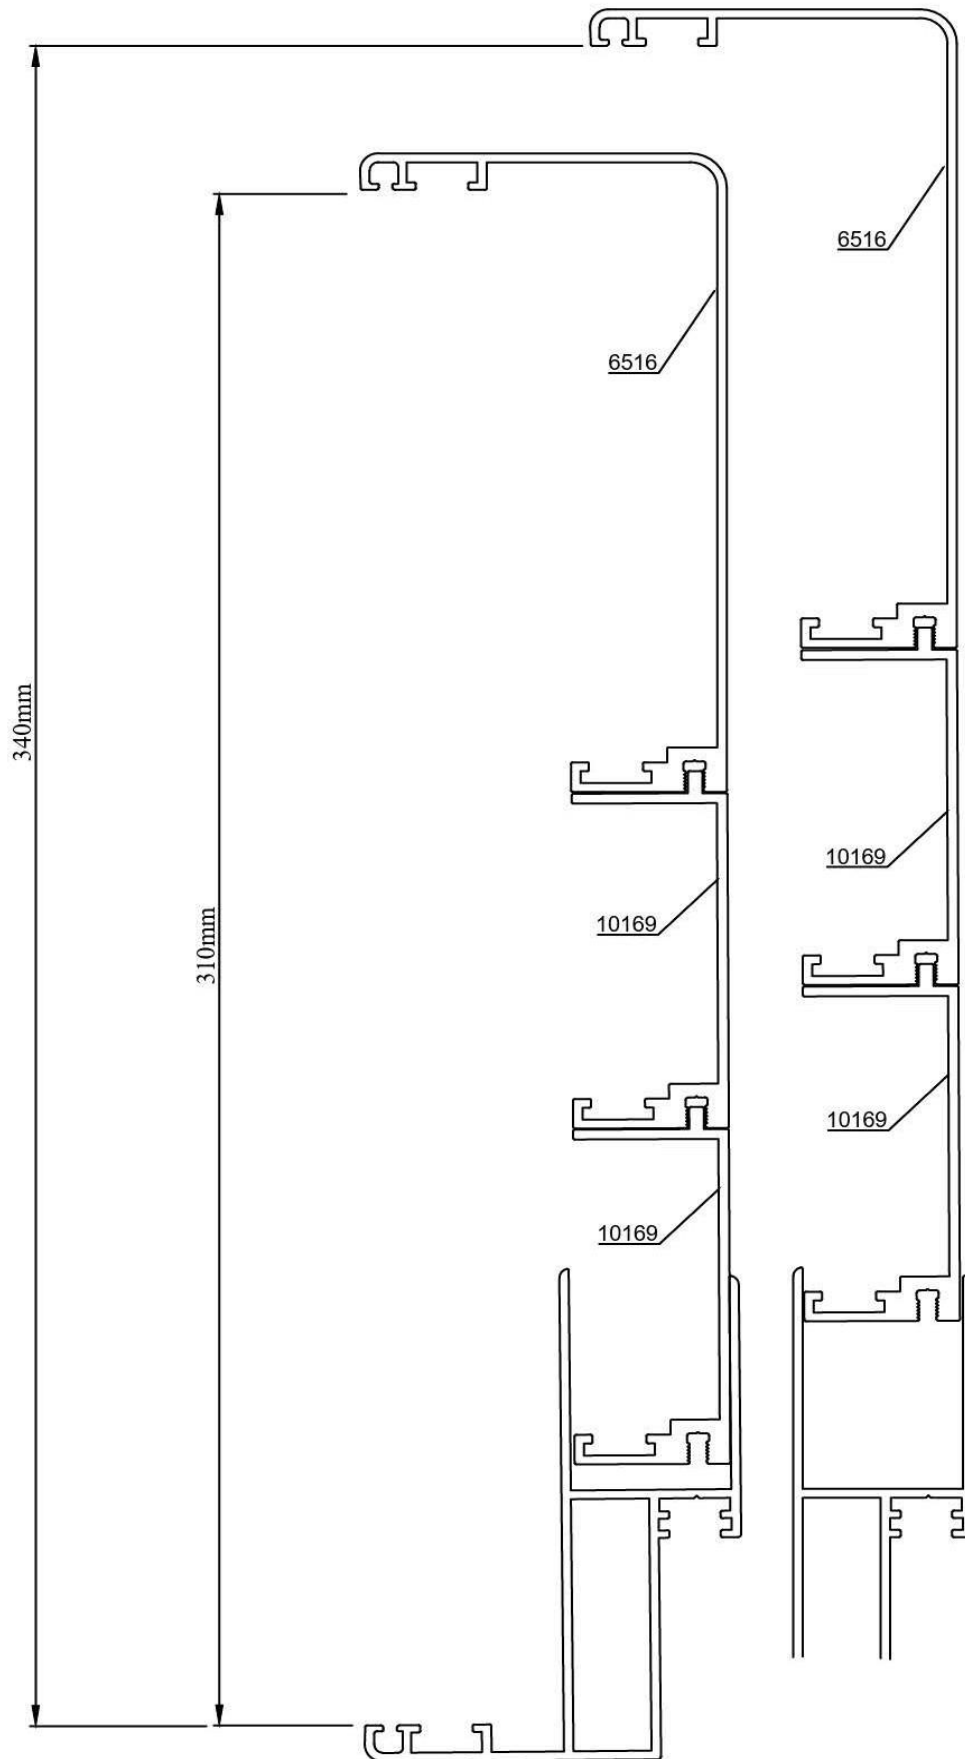

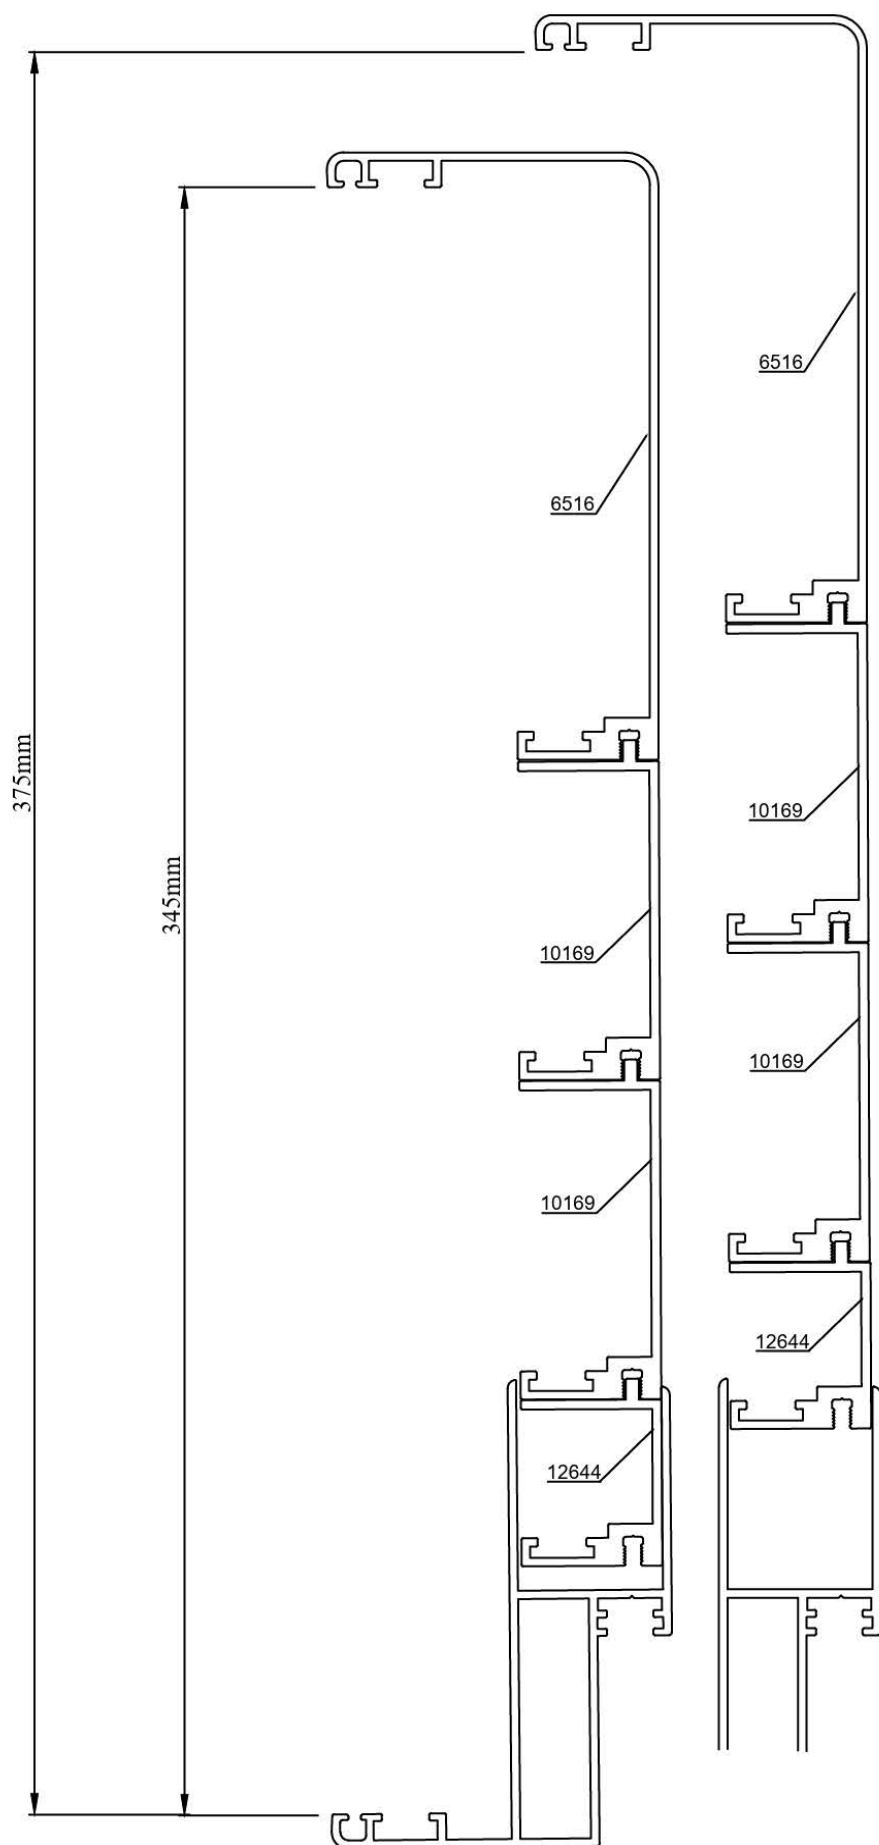

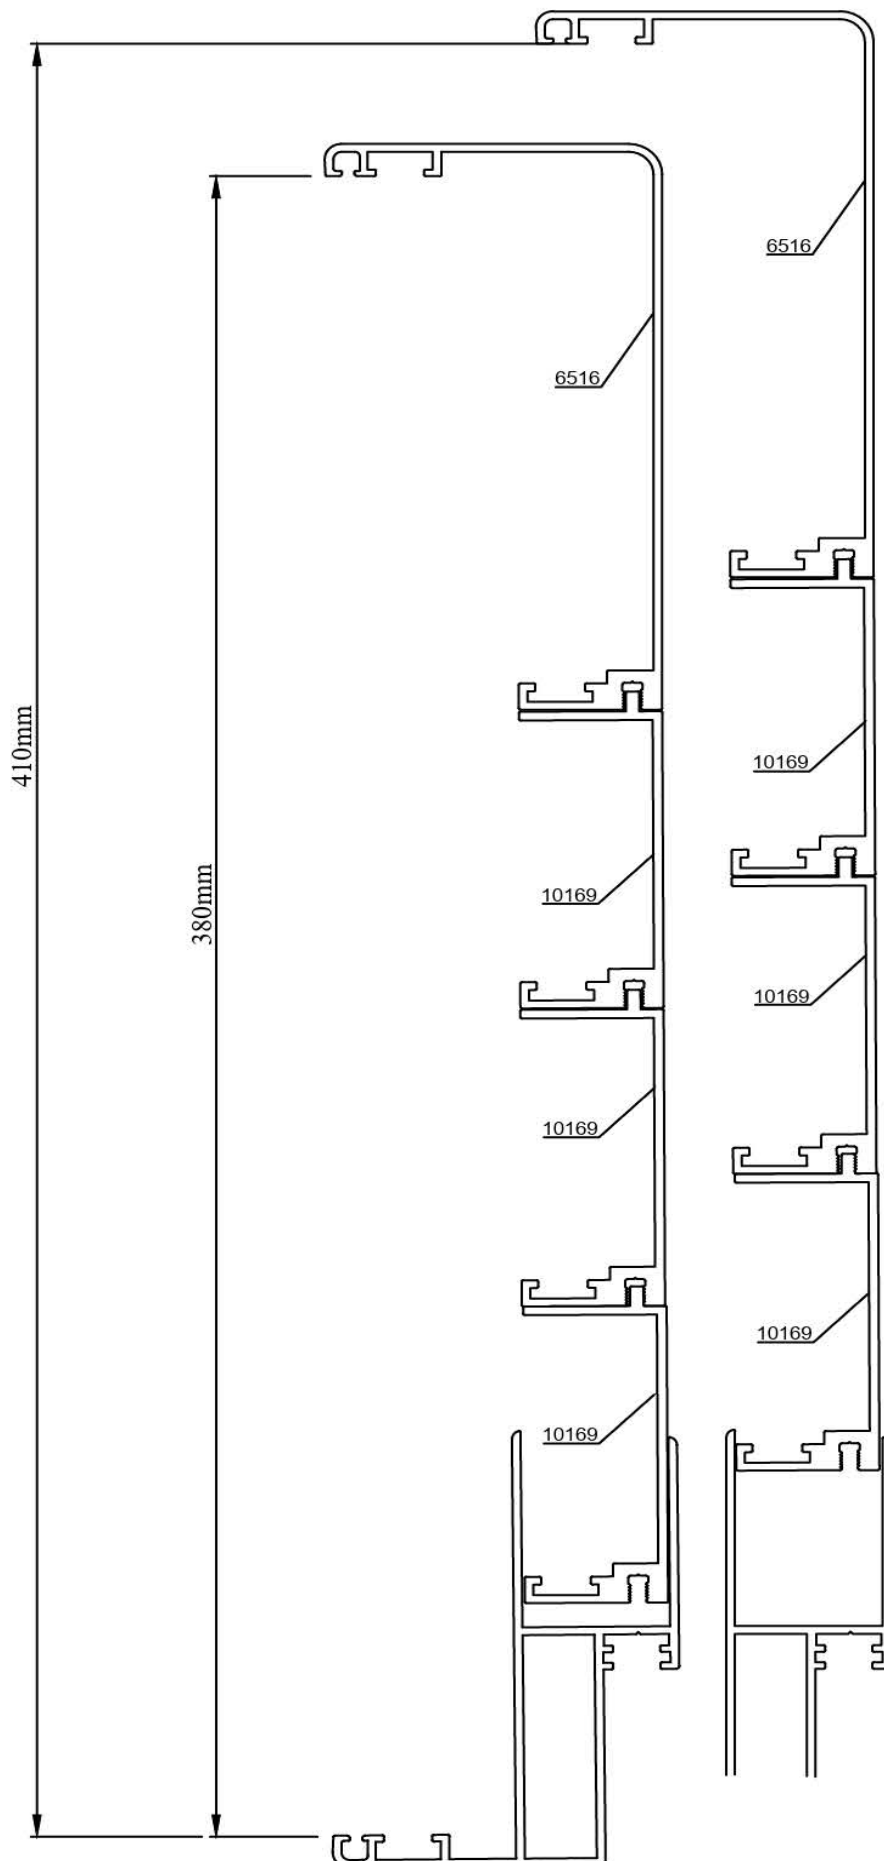




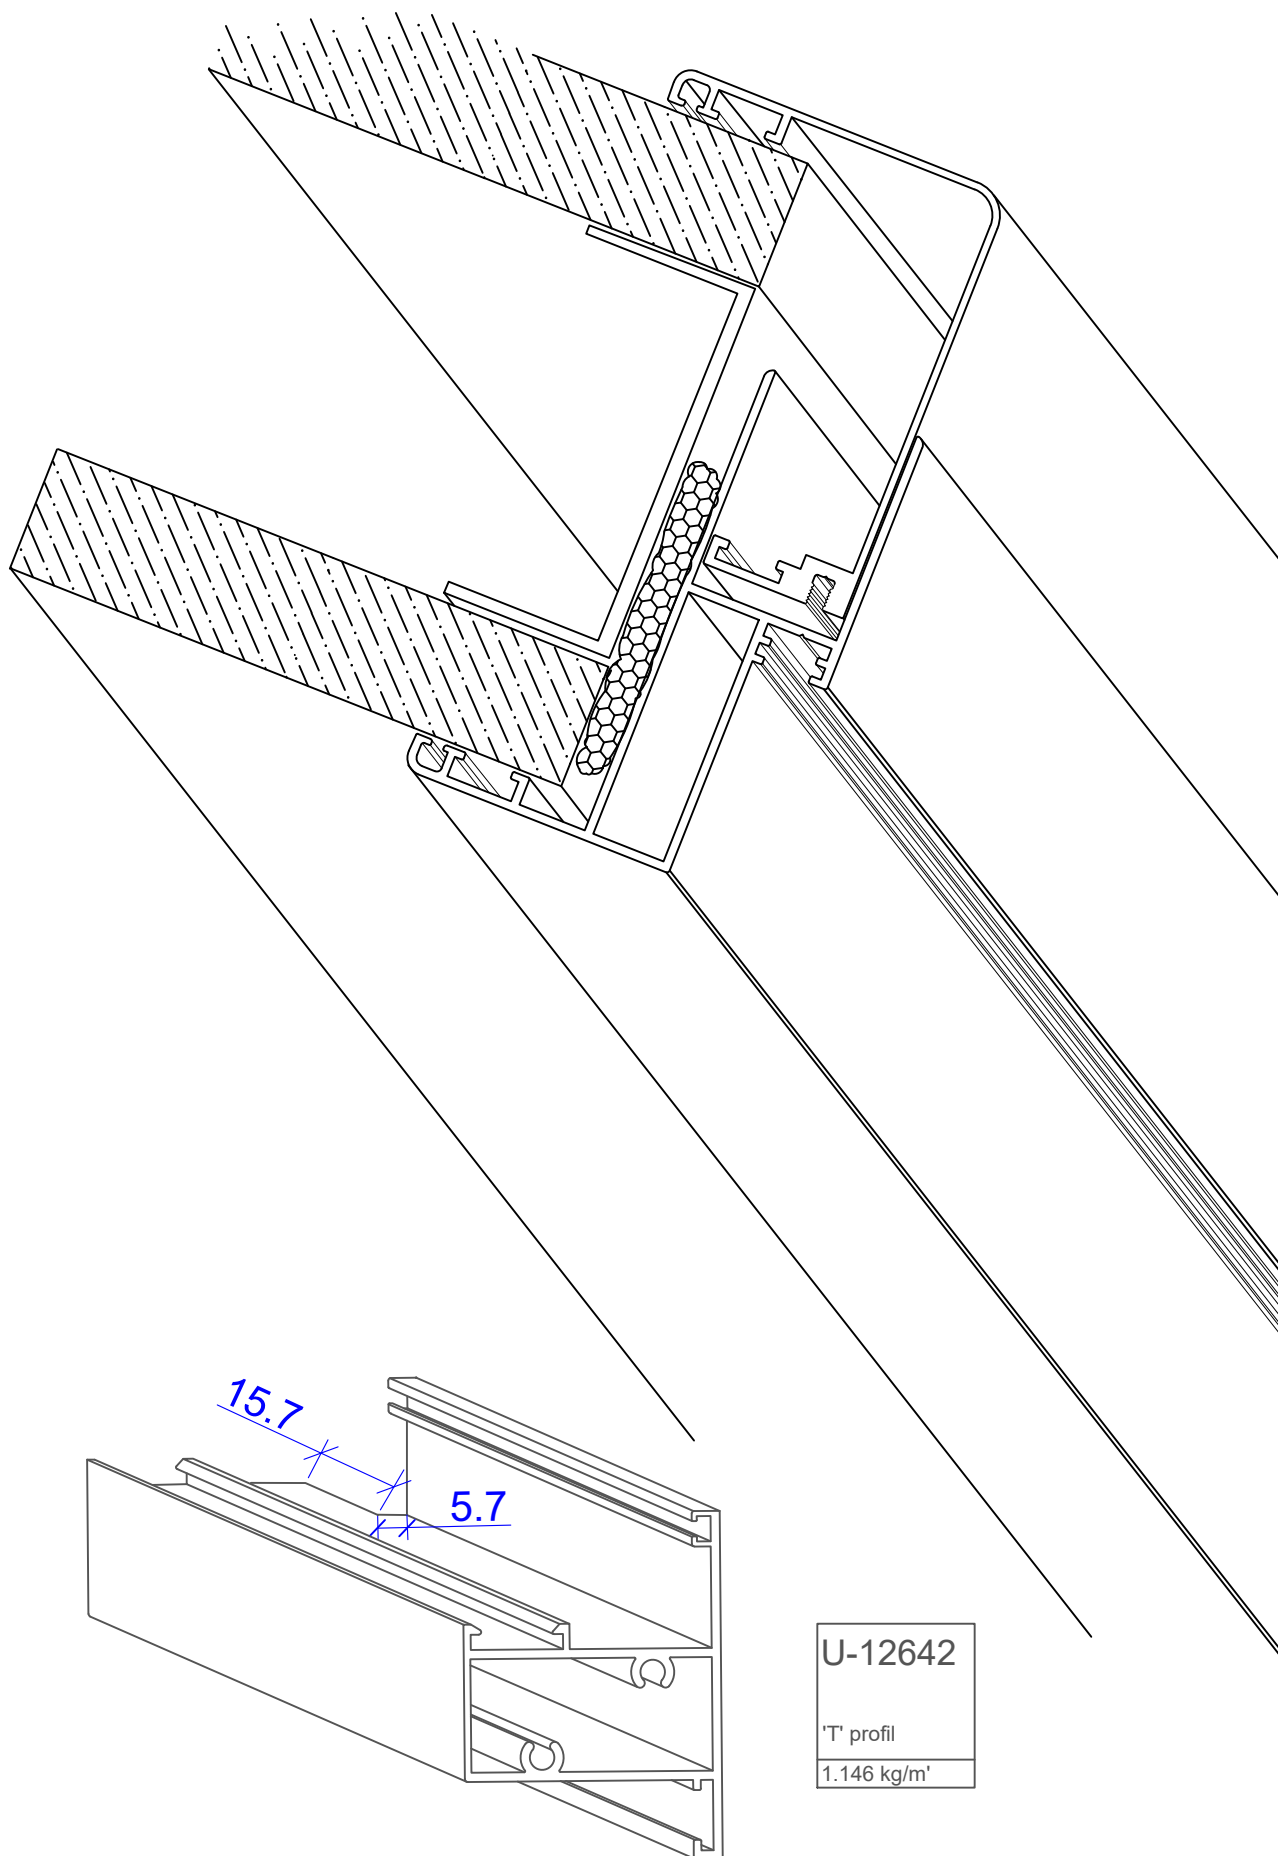


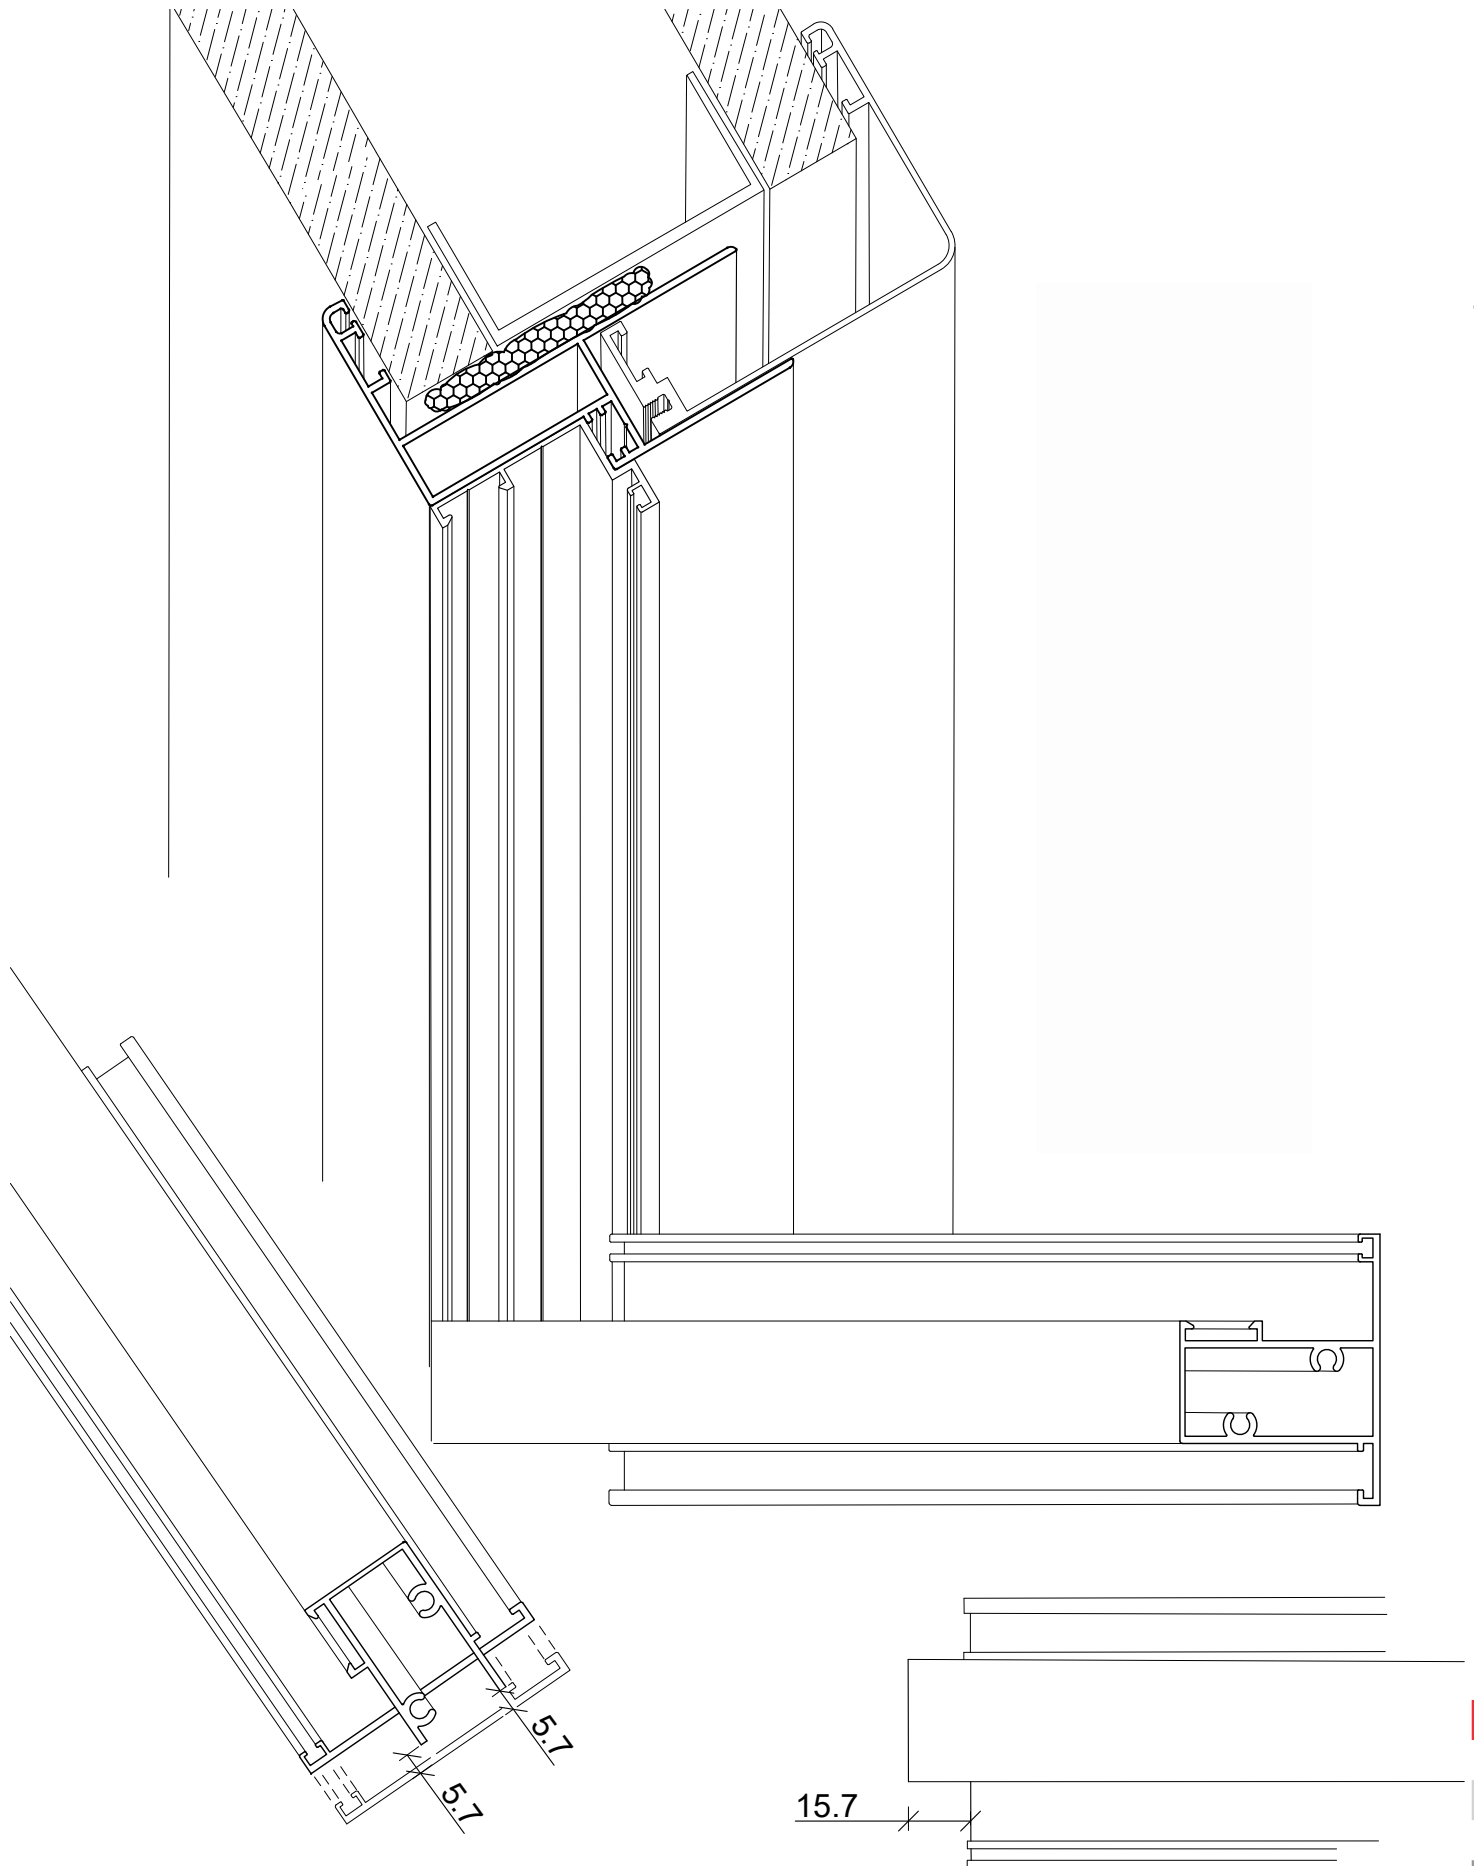

U-6517

Bazni profil

1.538 kg/m'

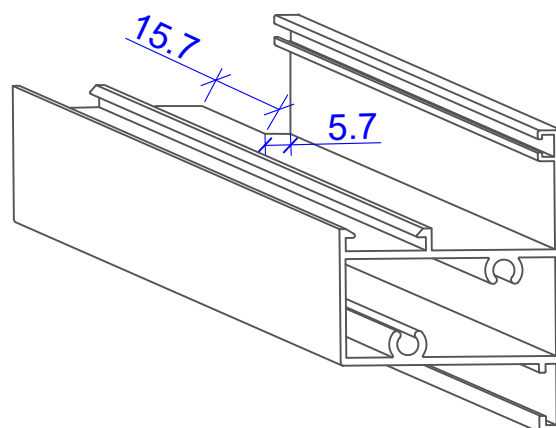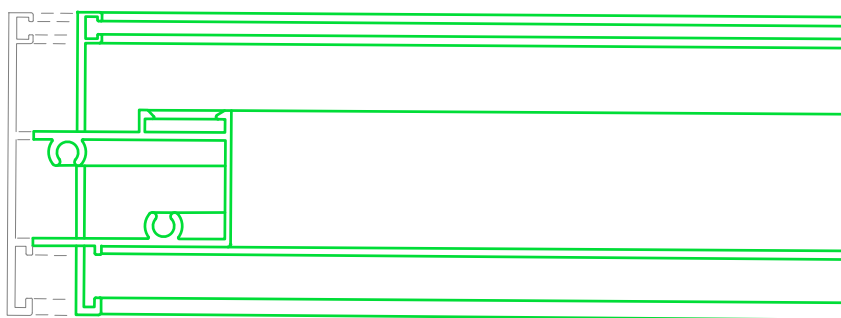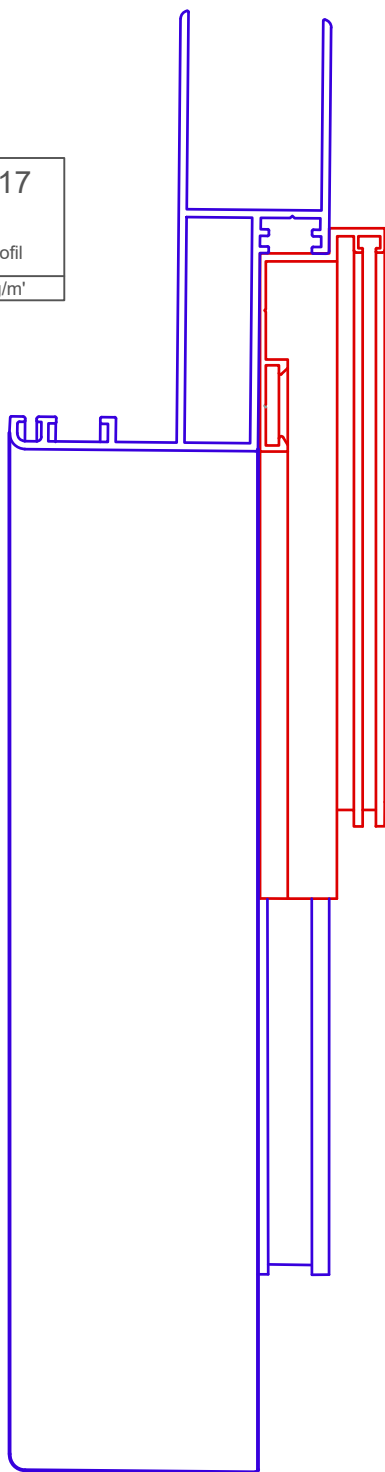

U-12642

'T' profil

1.146 kg/m'

