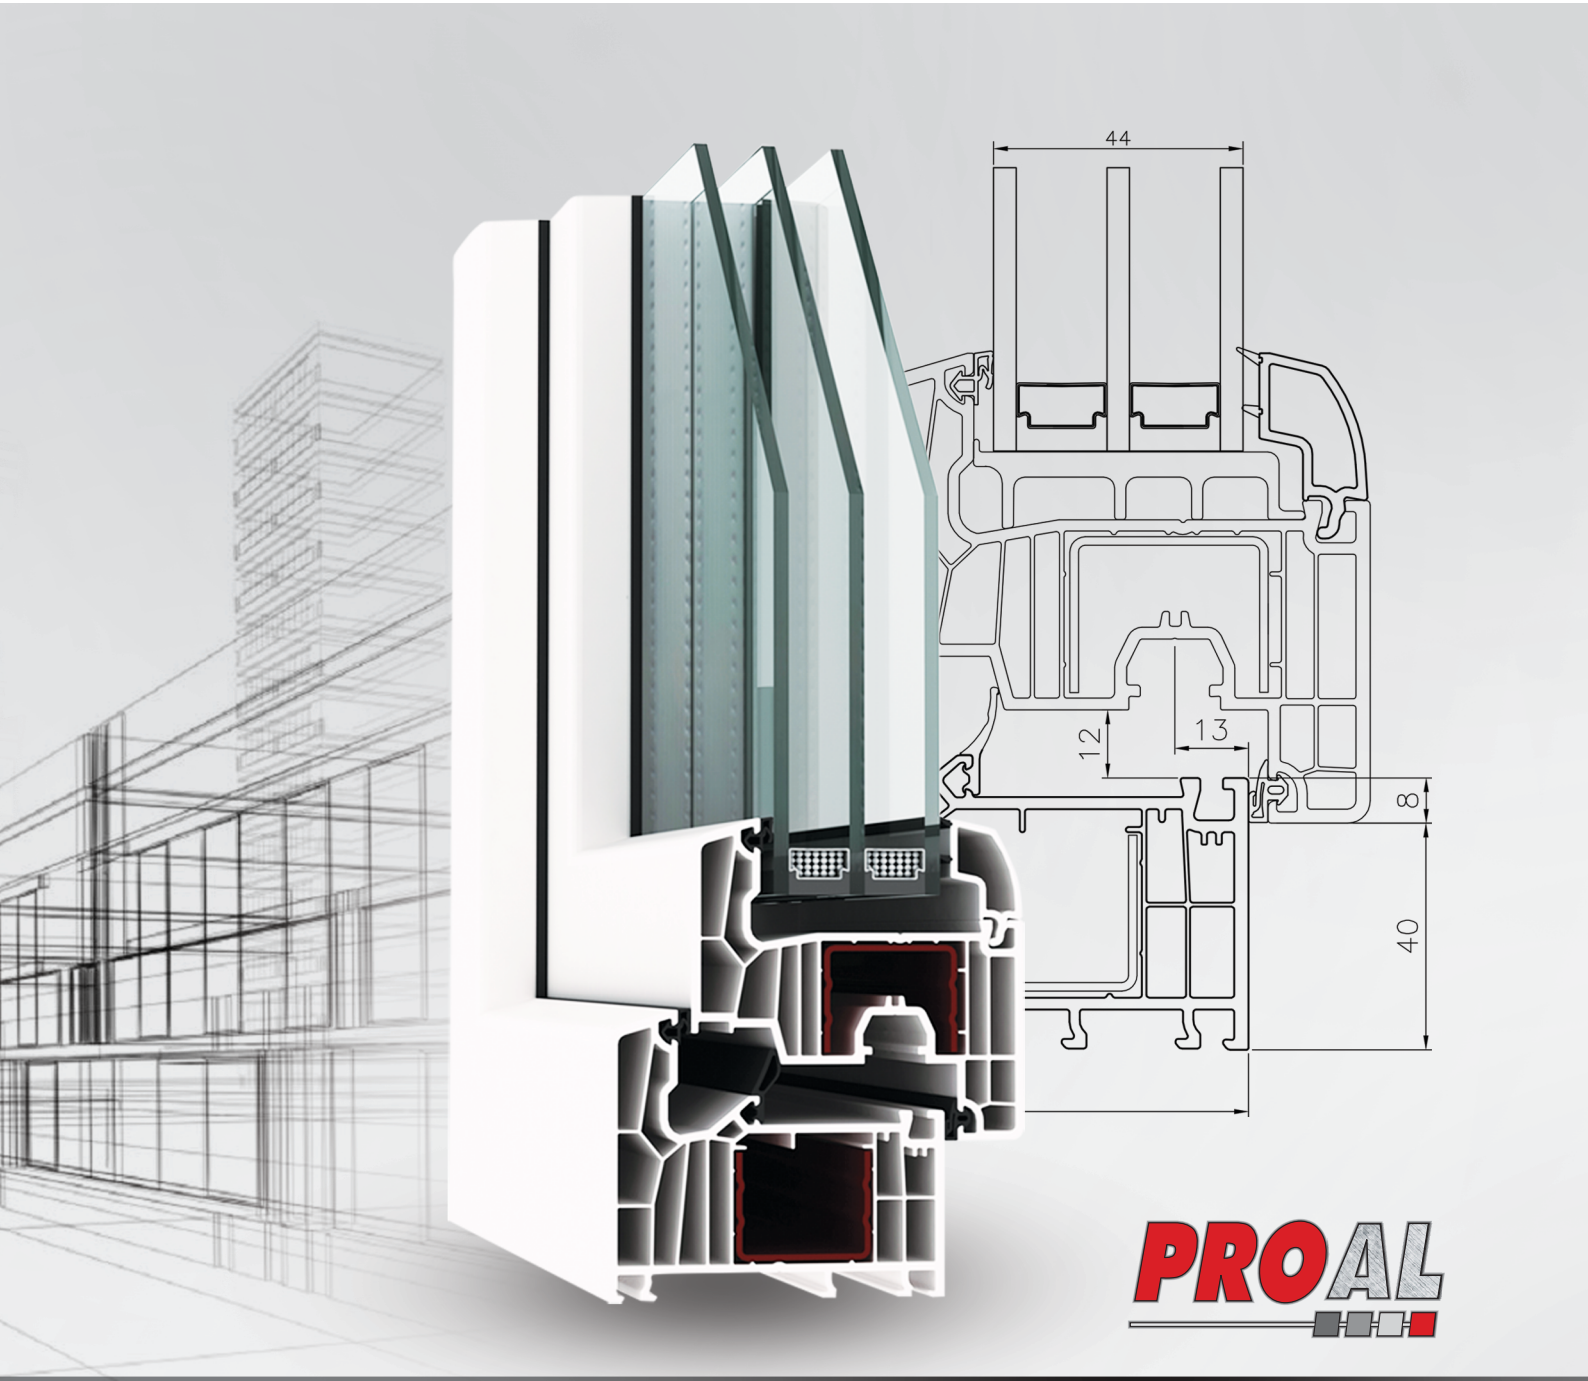

















PROAL

Ultima 70


Tehnički katalog / Technical catalogue

ŠIFRA CODE	Opis Description	Profil Profile
7101	Štok Frame	
Ultima 70		
7110	Štok Frame	
Ultima 70		
7201	Krilo Sash	
Ultima 70		
7210	Oblo krilo Sash	
Ultima 70		
7301	„T“ profil „T“ profile	
Ultima 70		
7601	Srednja dopuna Overhung	
Ultima 70		
7401	Krilo vrata Door sash	
Ultima 70		
7501	Krilo u polje Sash in the space	
Ultima 70		
7701	Kugla Bay&bow pole	
Ultima 70		
7801	Adapter kugle Bay&bow adaptor	
Ultima 70		
1400	Proširenje štoka Frame extension	
Ultima 70		
1500	Ugao 90° Corner profile	
Ultima 70		


ŠIFRA CODE	Opis Description	Profil Profile
1017	Čep srednje dopune Overhung cover	
Ultima 70		
1012	Spojnica „T“ profila Metal mullion connector	
Ultima 70		
1230	Aluminijumski prag za vrata Doorsteel	
Ultima 70		
1231	Čep aluminijumskog praga Cover for doorsteel	
Ultima 70		

ŠIFRA CODE	Opis Description	Profil Profile
1101 32 mm	Lajsna za staklo Glassbead	
Ultima 70		
1003 36 mm	Lajsna za staklo Glassbead	
Ultima 70		
1007 24 mm	Lajsna za staklo Glassbead	
Ultima 70		
	Guma Rubber	
Ultima 70		


7101
Štok / Frame

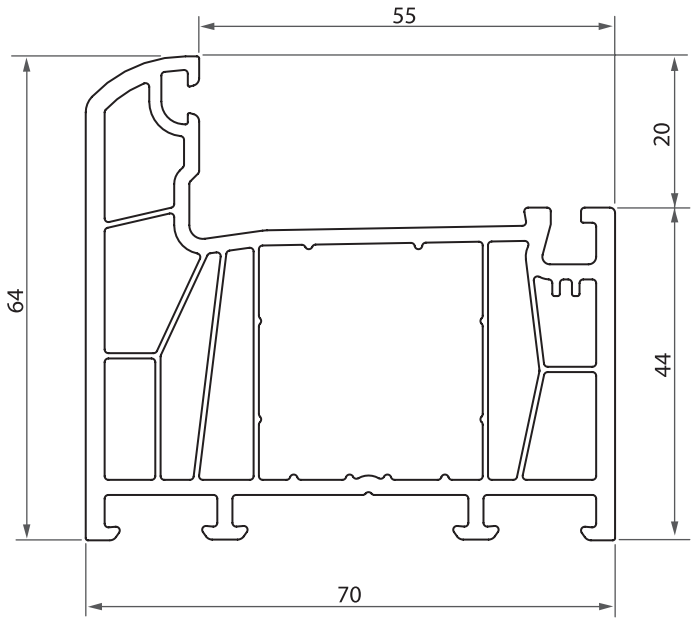


7110
Krilo za renovaciju/ Frame

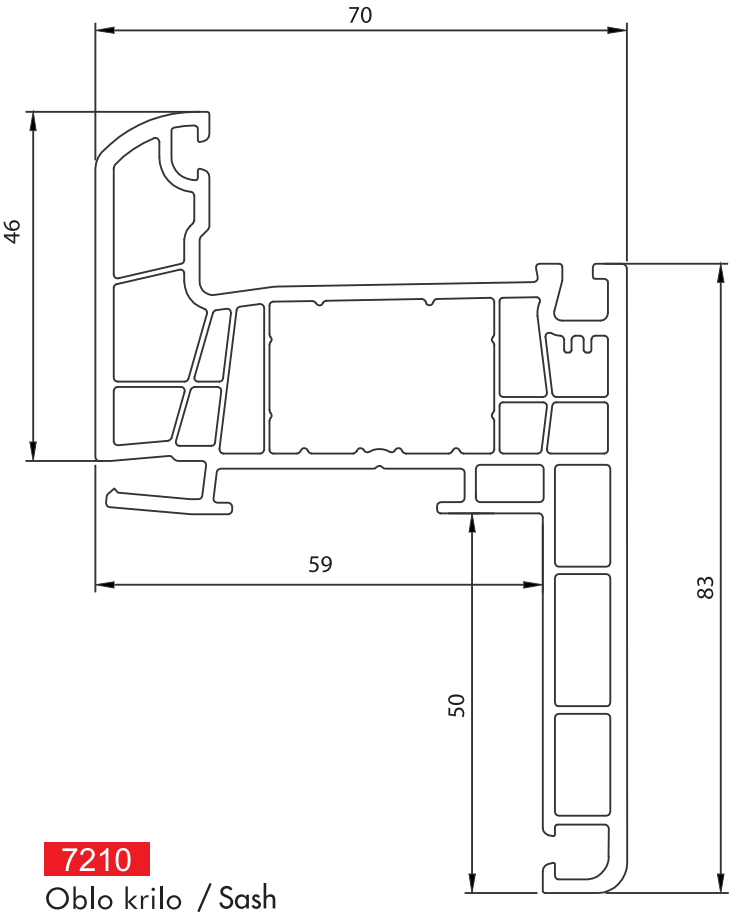

7201
Krilo / Sash

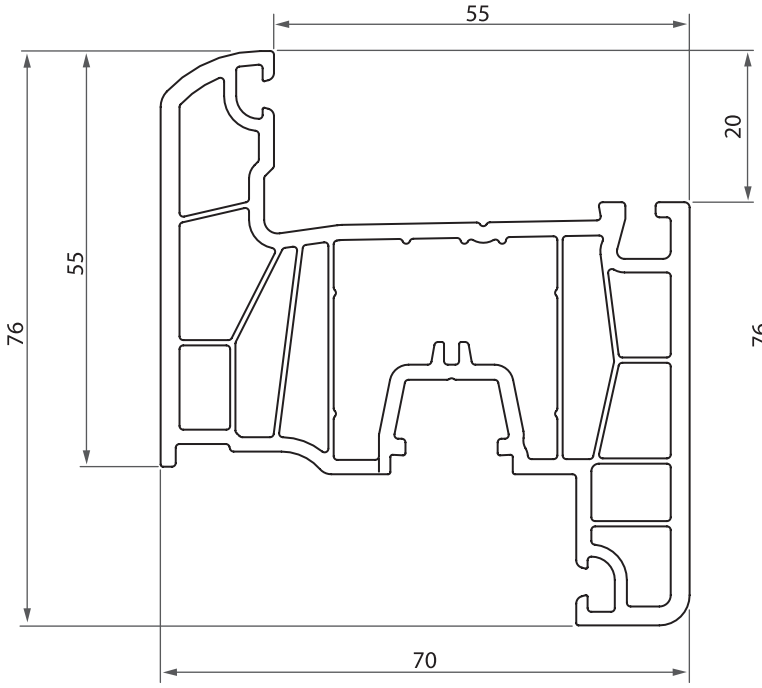


7210
Oblo krilo / Sash

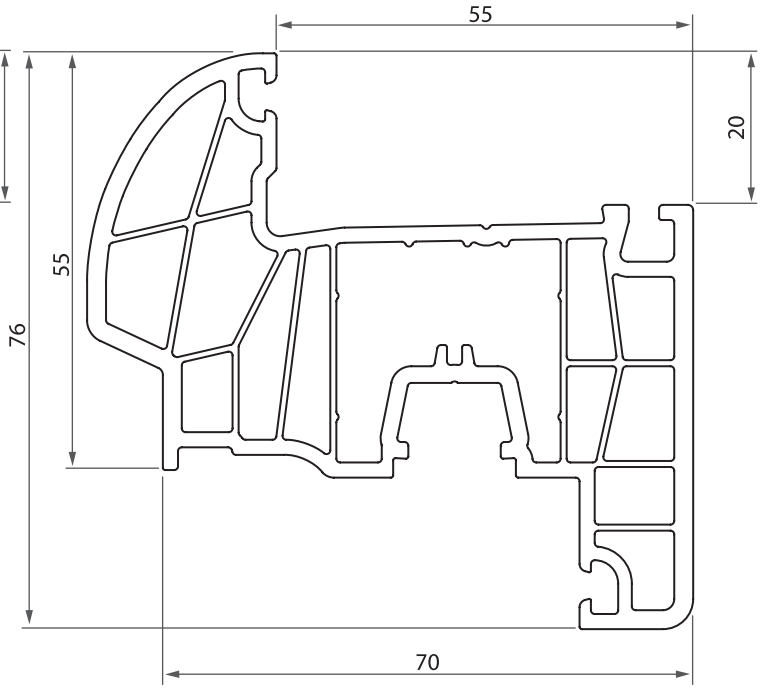


7301

„T“ profil / „T“ profile

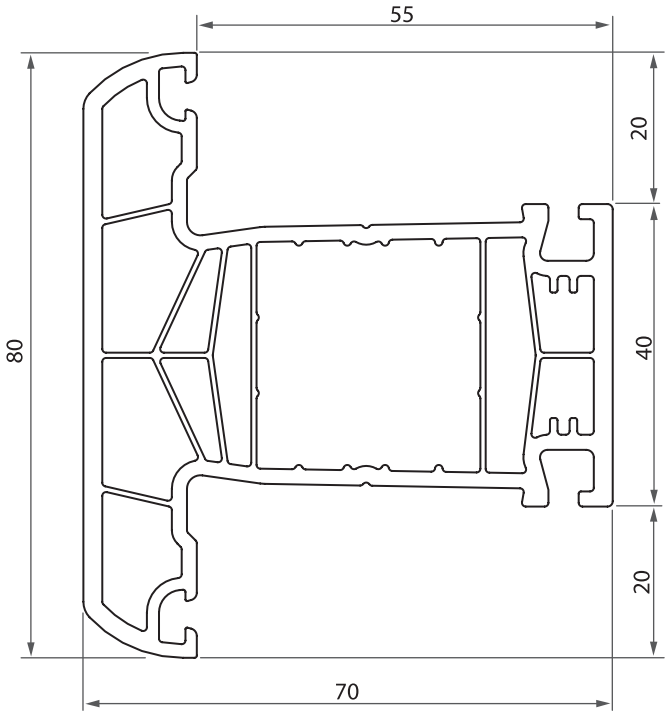


7601

Srednja dopuna /Overhung

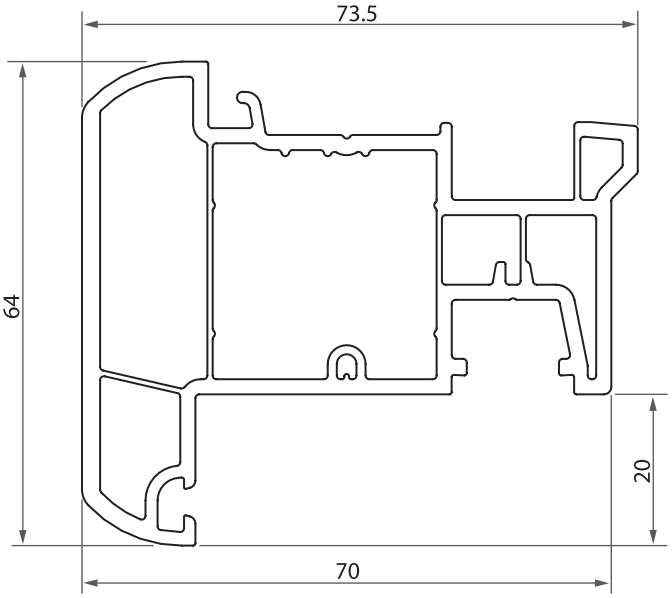


7401

Krilo vrata / Door sash

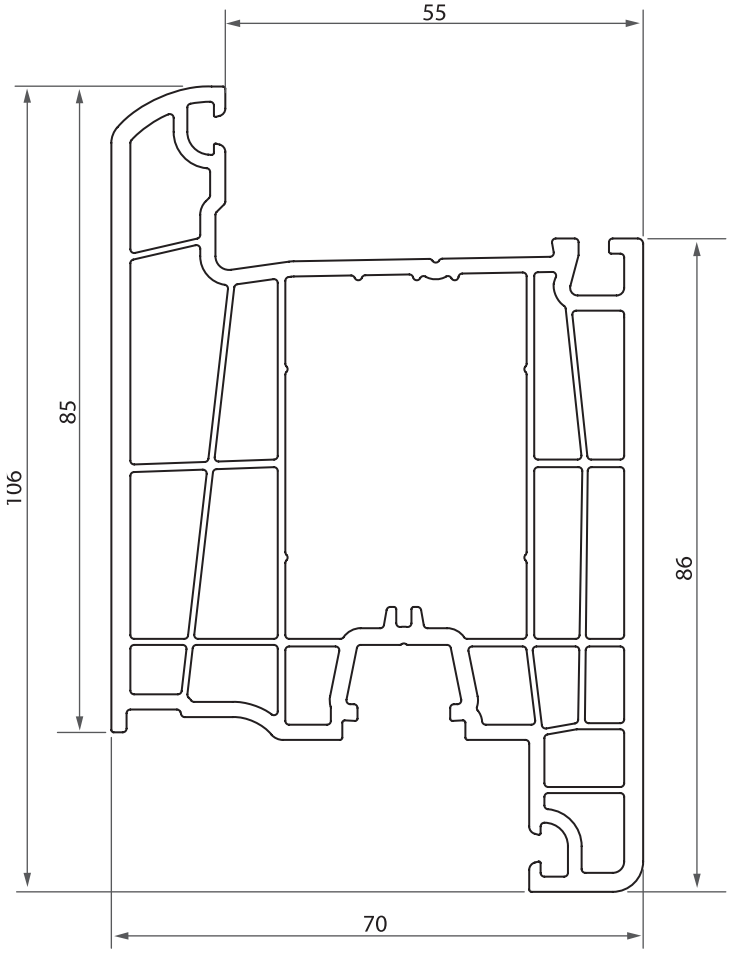

7501


Krilo u polje / Sash in the space

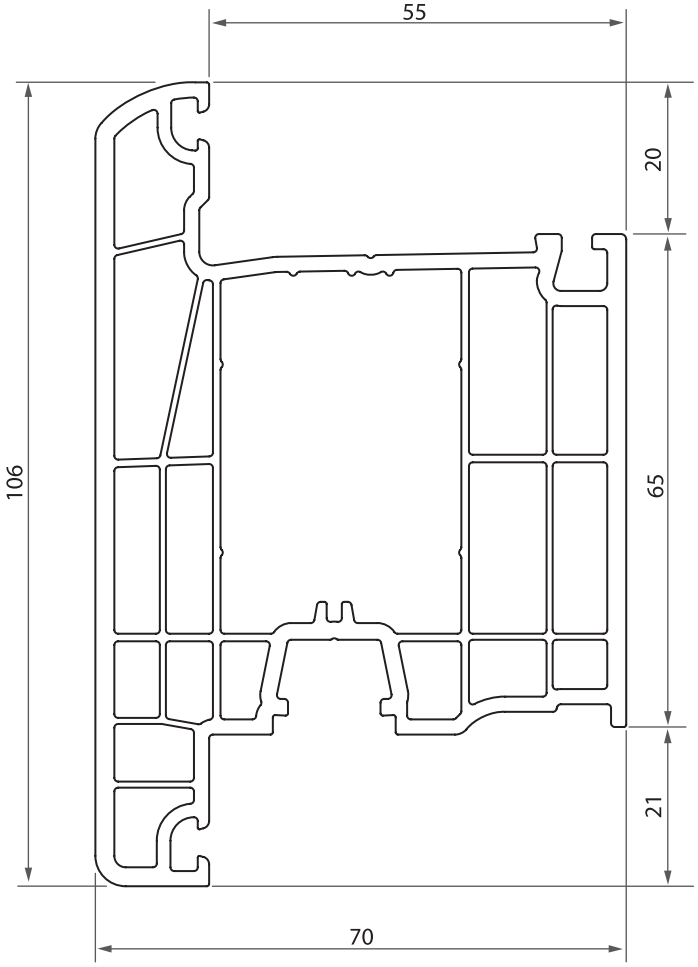

1101

Lajsna za staklo
Glassbead


/32 mm/



1007

Lajsna za staklo
Glassbead


/24 mm/



1003


Lajsna za staklo
Glassbead

/36 mm/




7701

Kugla / Bay & bow pole

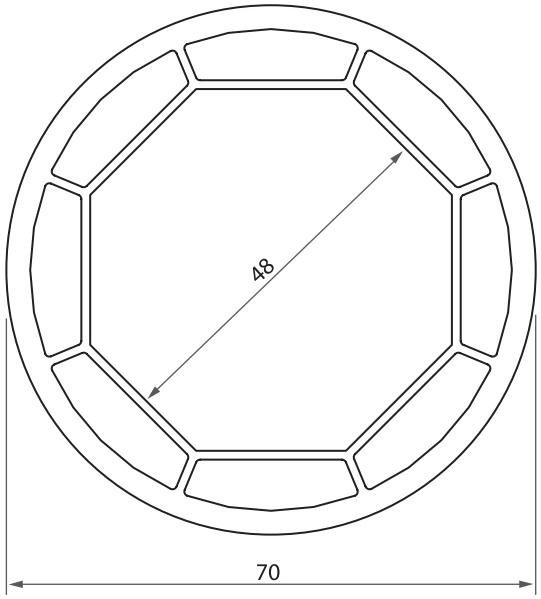


1500

Ugao 90°/ Corner profile

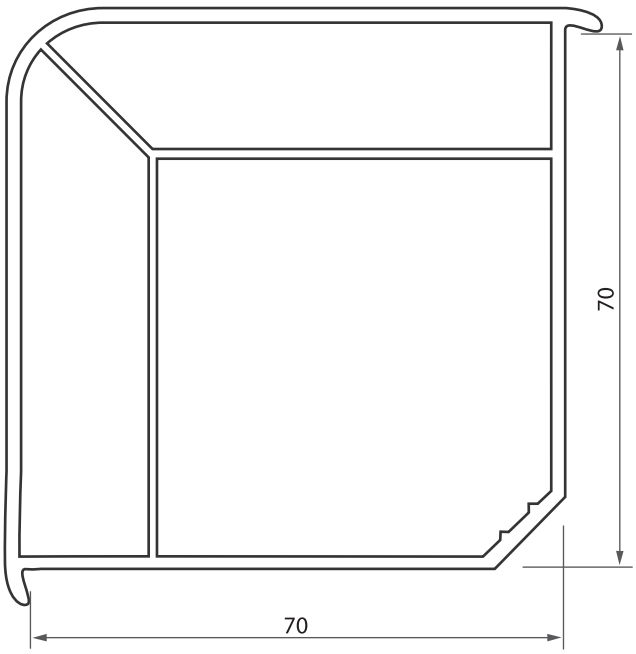


7801


Adapter kugle / Bay&bow adaptor

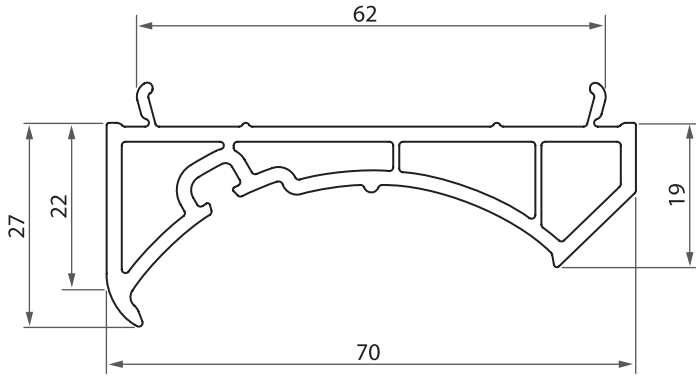

1500

Proširenje štoka
Frame extension

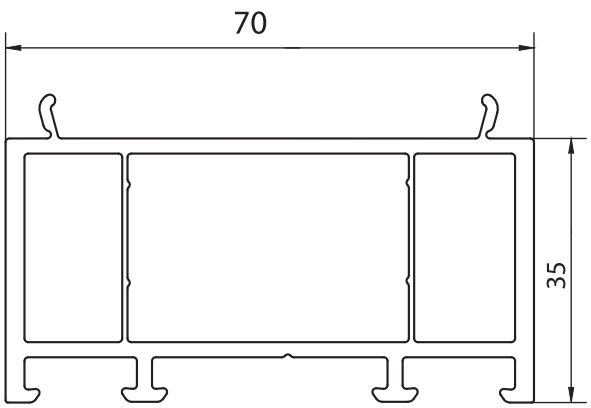


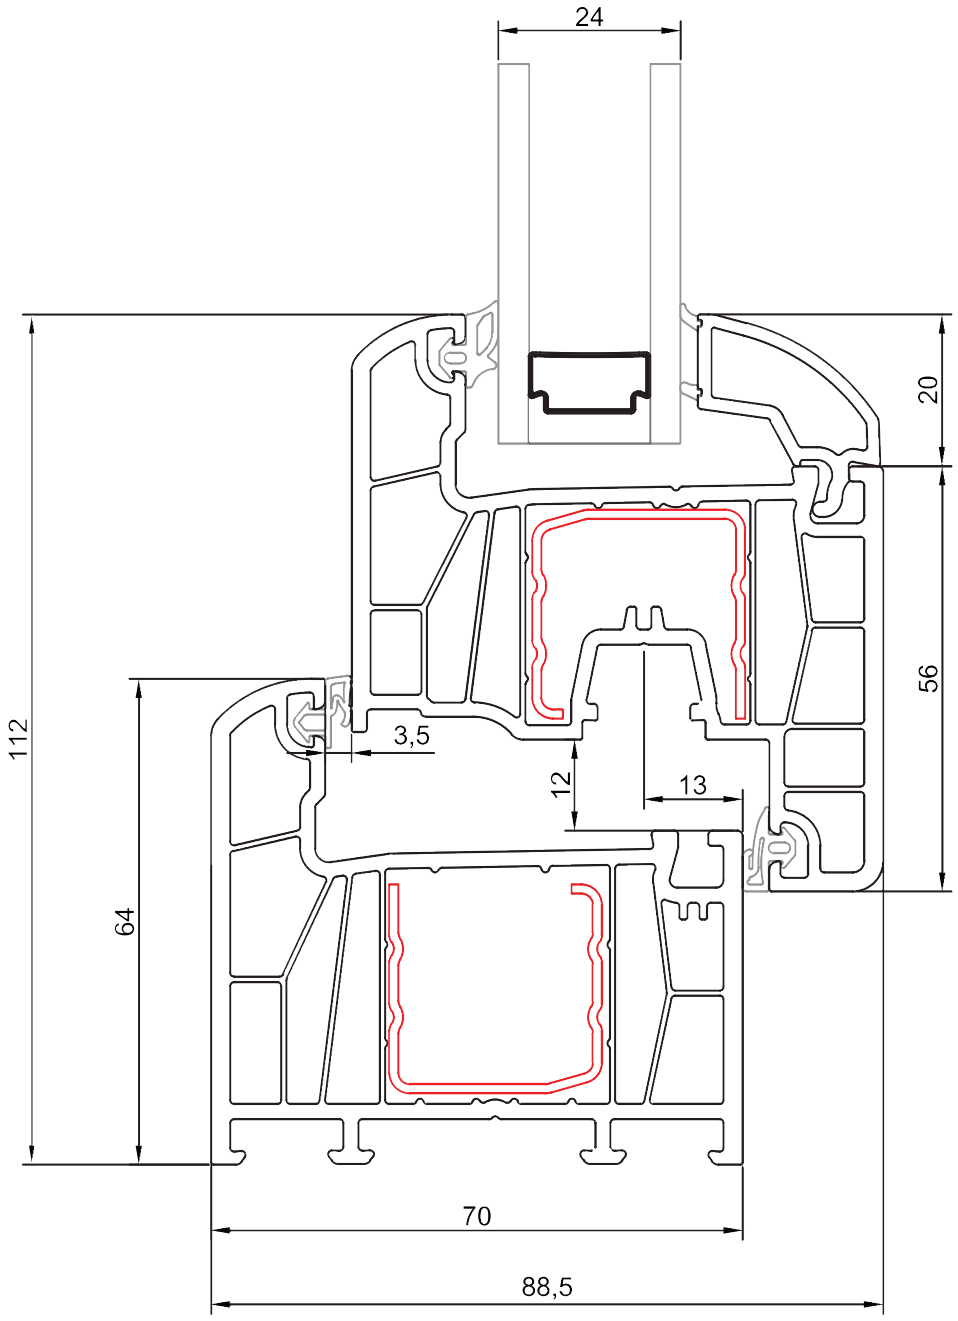

M 1:1

Razmera


Cutting out

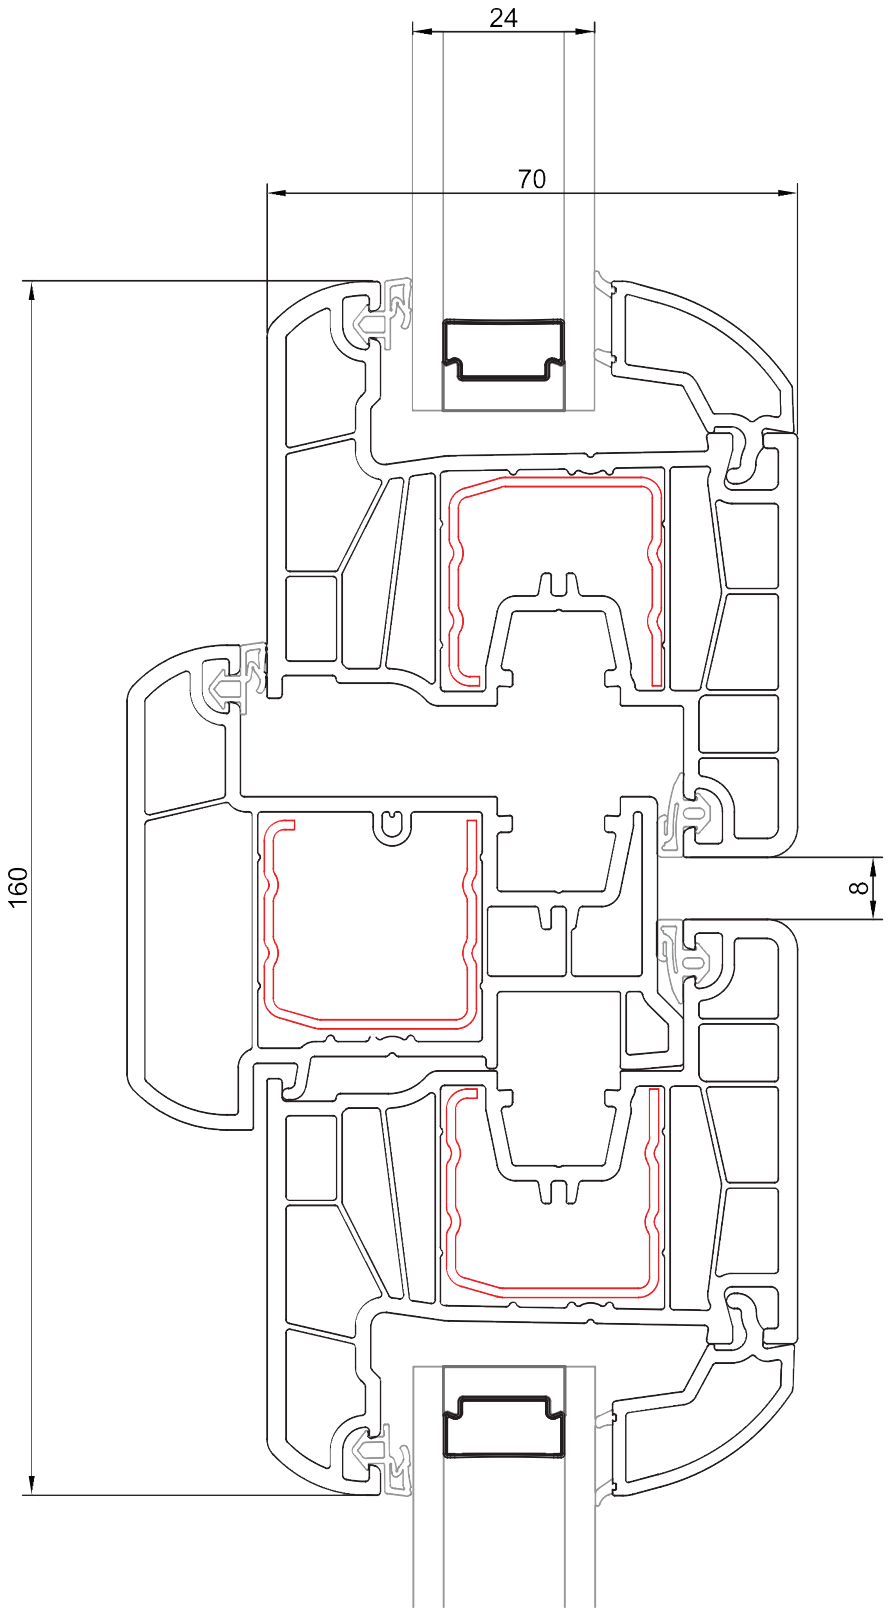

M 1:1

Razmera

Cutting out

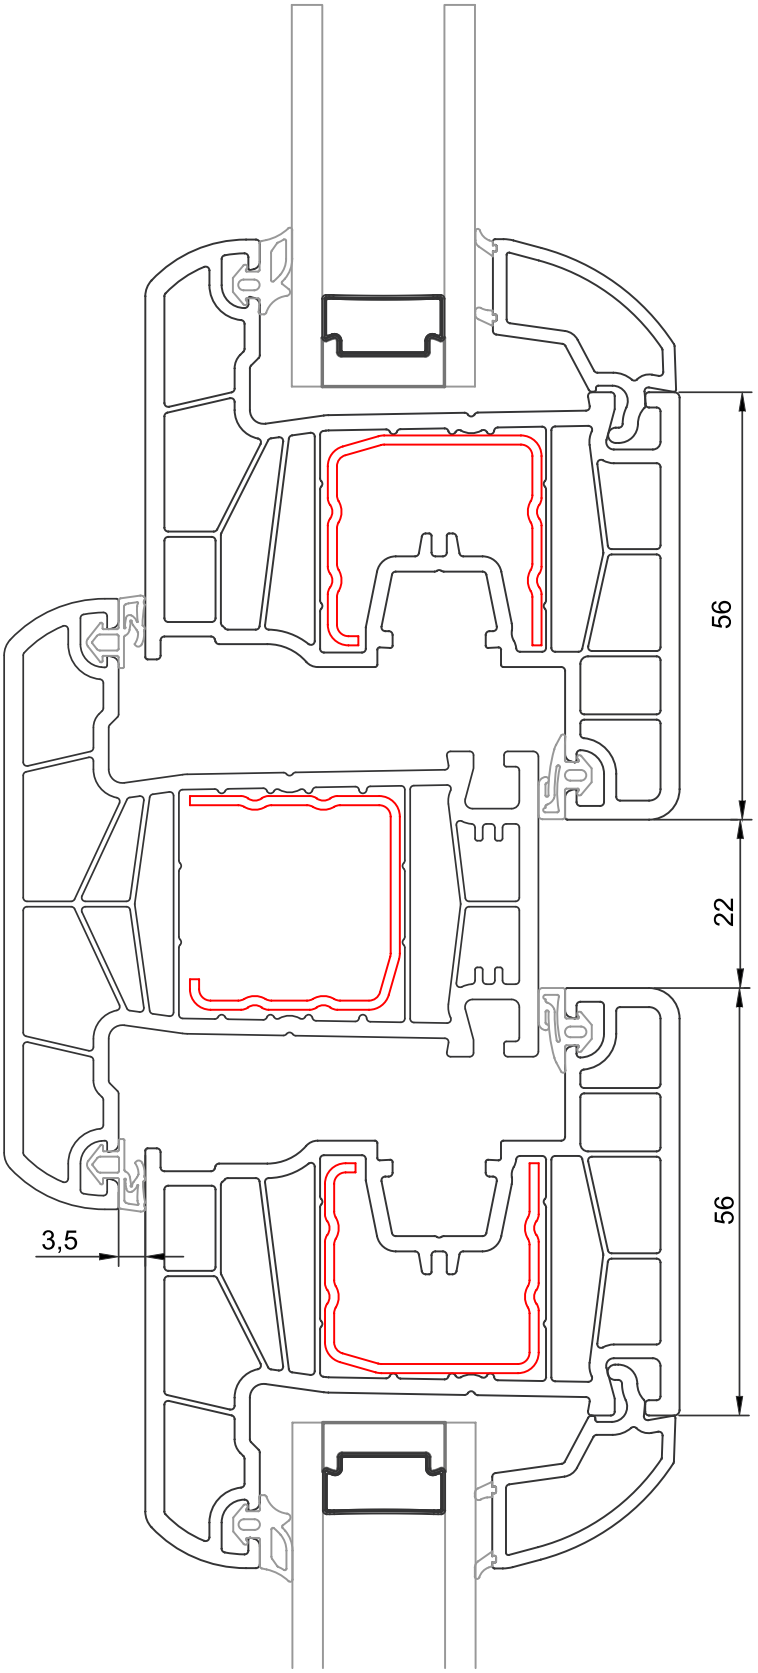

M 1:1


Razmera

Cutting out

Karakteristike sistema
System characteristics


Savremeni SoftLine dizajn zaobljenih površina

- 7 komora oblo krilo širine 80 mm
- Poboljšane karakteristike usklađene sa Ultima 70
- Promenom strukture poboljšane karakteristike krila
- Mogućnost kombinovanja elemenata iz sistema Ultima 70
- Staklo paket do 36 mm

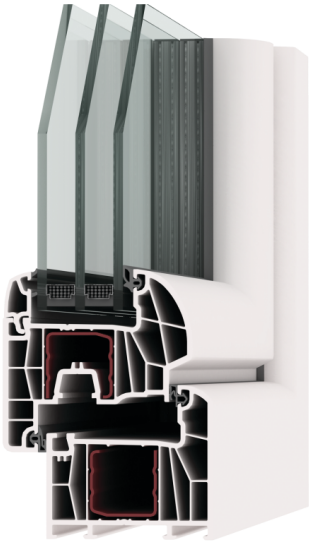

Modern SoftLine design with oval shapes

- 80 mm oval sash with 7 chambers
- Improved performance for thermal insulation in comparison to Ultima 70
- Improved statics thanks to the reinforced structure of the sash
- Combination with all elements of the system Ultima 70
- Glazing up to 36 mm

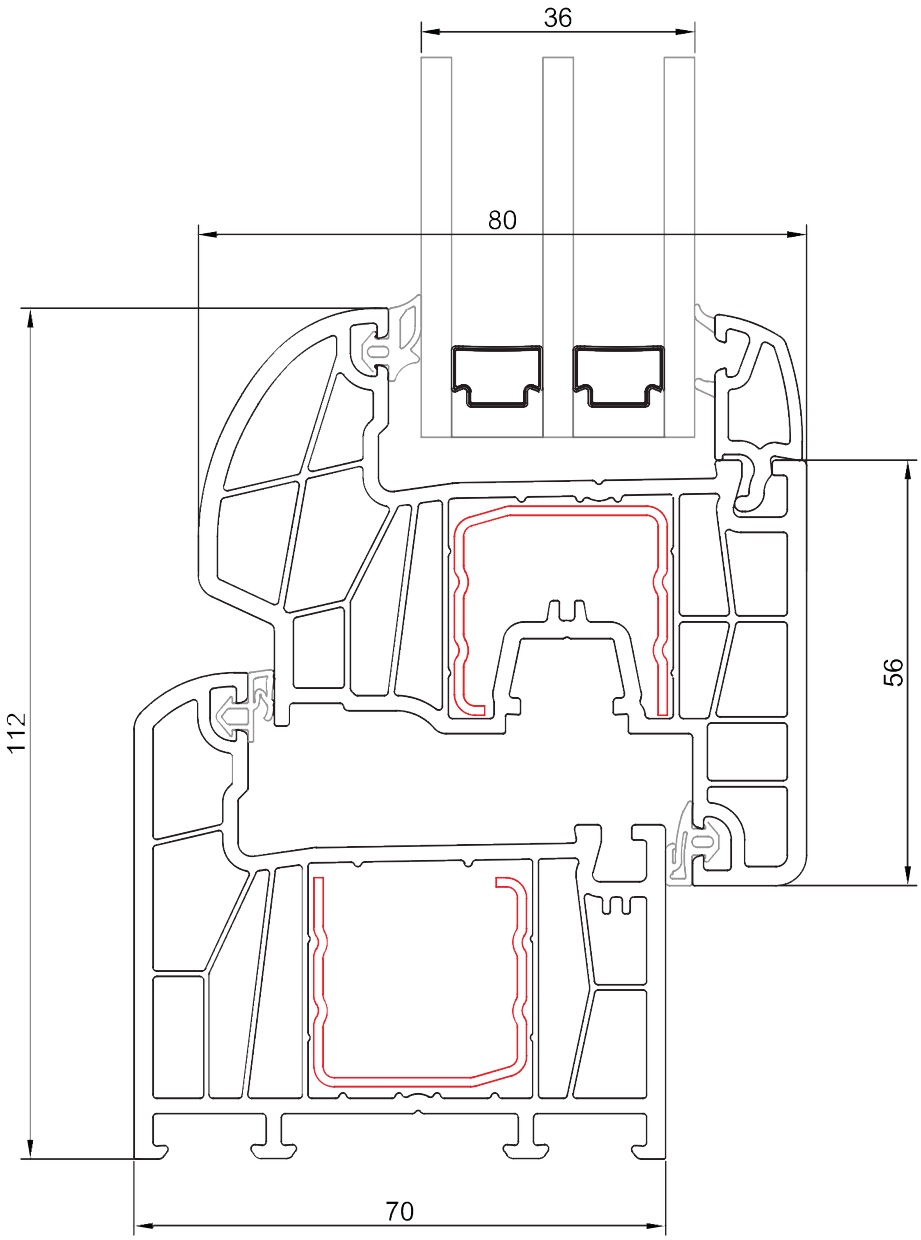

M 1:1


Razmera

Cutting out

Karakteristike sistema
System characteristics


Sistem za renoviranje sa čistom ugradnjom

- Sistem sa 6 komora, ugradne mere 70 mm
- Specifičan dizajn pogodan za laku zamenu stare stolarije
- Velika površina svetla
- Mogućnost kombinovanja sa elementima iz sistema Ultima 70
- Staklo paket do 36 mm

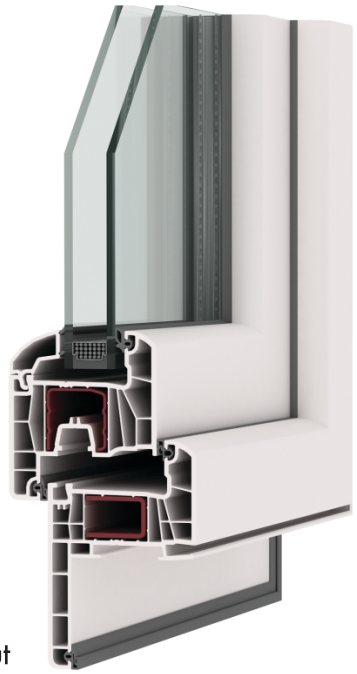

System for renovation with clean installation

- 6-chamber system with a base width of 70 mm
- Specific design of the frame, designed for renewal without dismantling the existing windows
- Maximum preservation of the bright part of window
- Compatible with all elements of Ultima 70 and Ultima SoftLine
- Glazing up to 36 mm

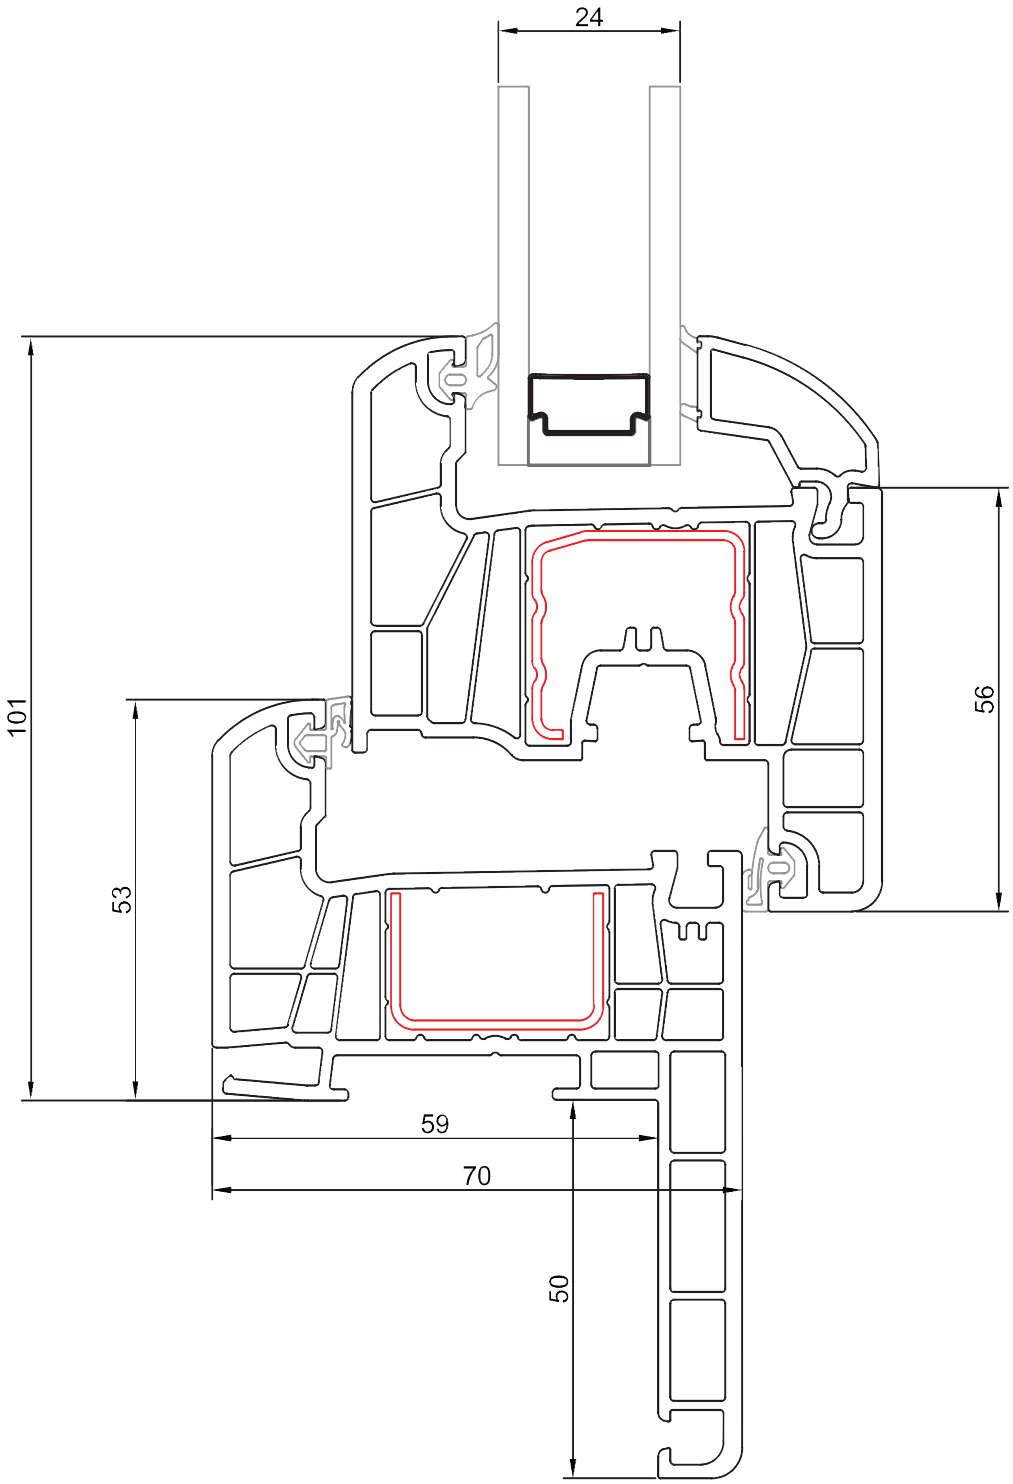


M 1:1

Razmera


Cutting out

Ultima 70


7101




7201




7301



7401

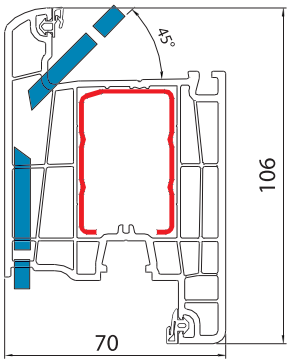


7501

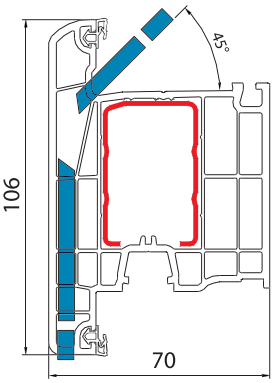


ReNova

7110

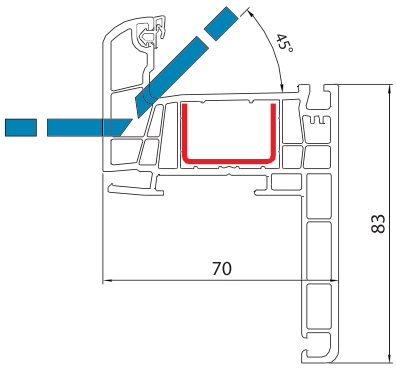


Ultima SoftLine

7210




Ultima Alprotect

A1011




A2011




Maxima 88


8101

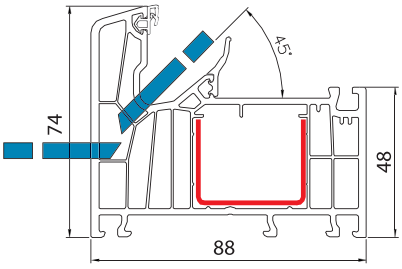

8201





8301

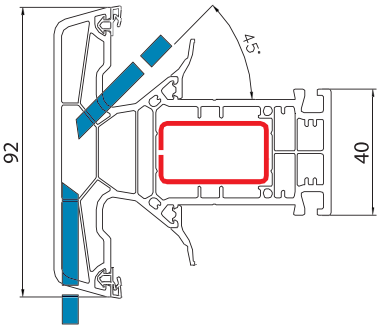


Pravilo za ventilaciju i drenažu
Rulers for ventilation and drainage



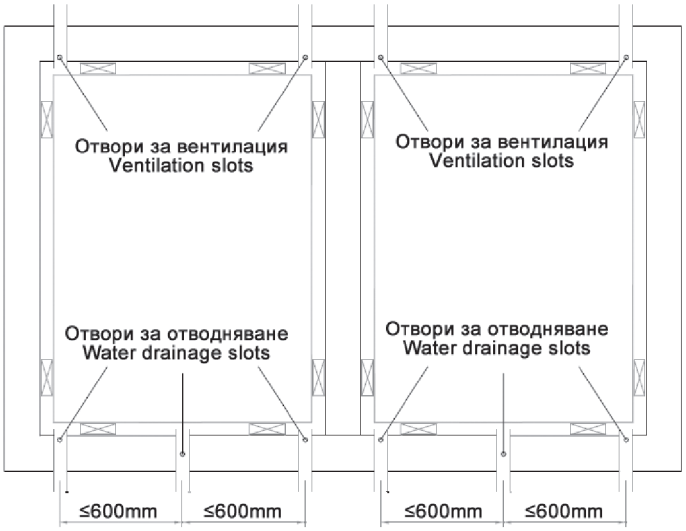

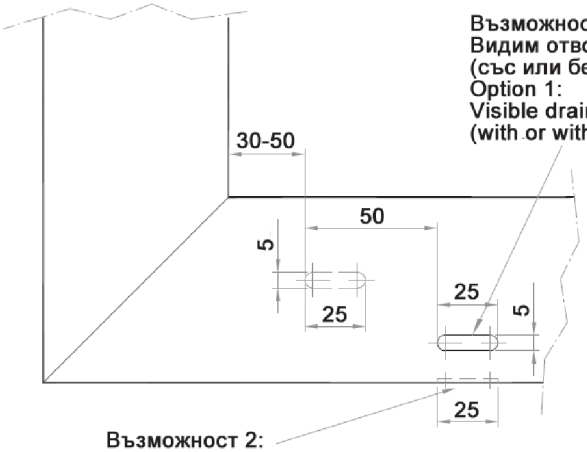


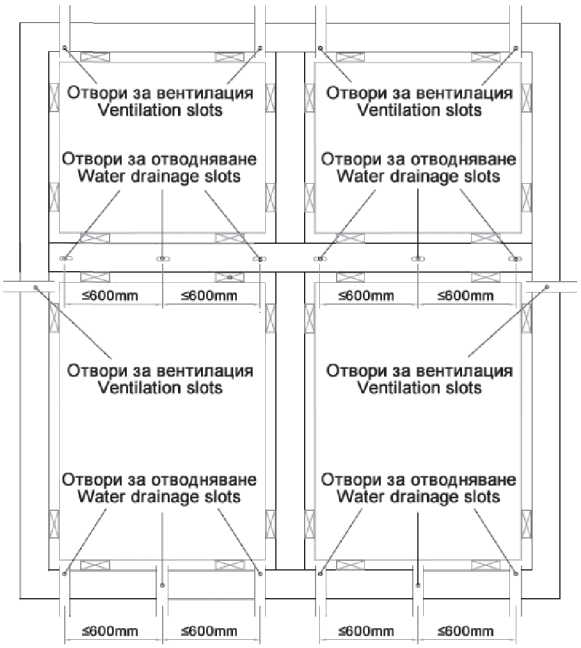

Uputstvo za fiksiranje u vertikali
Rules for vertical reinforcement

A = Distance betw. fixing points
E = Distance to corner
P = Distance to mullion


	white profiles	color profiles
A	max 700mm	max 700mm
E	ca.150mm	ca.250mm
P	ca.150mm	ca.250mm

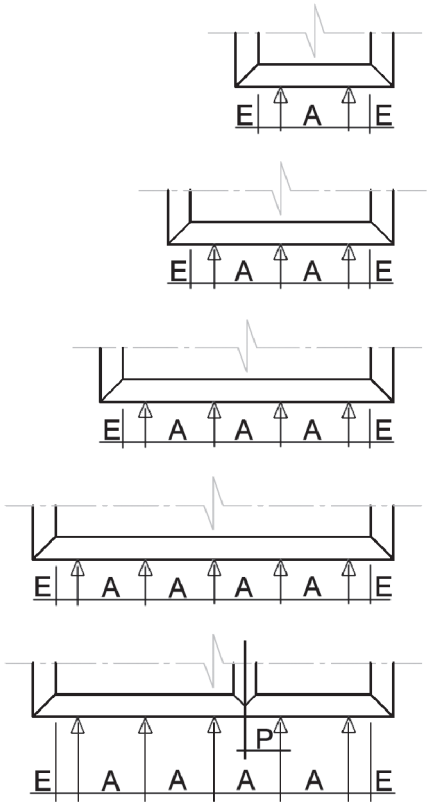

Uputstvo za fiksiranje u horizontali
Rules for strengthening horizontal

A = Distance betw. fixing points
P = Distance to mullion

	white profiles	color profiles
A	max 700mm	max 700mm
P	ca.150mm	ca.250mm

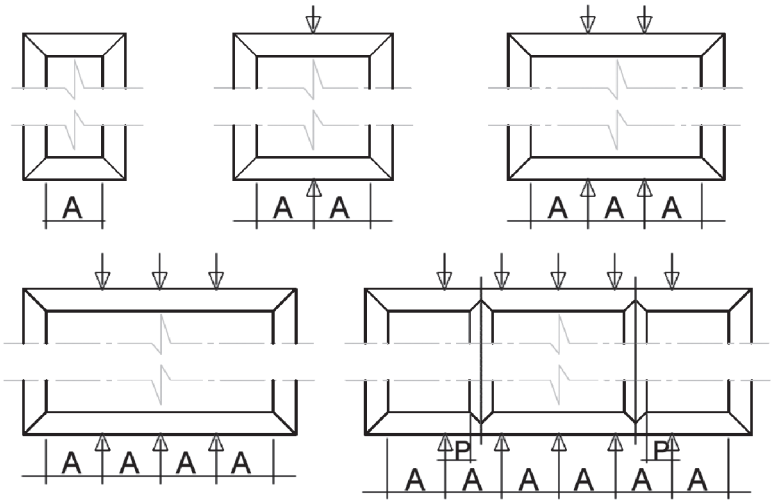



Formule za sečenje
Formulas for cutting


Formula / Formula	**Primer** / Example FR = 1500 mm
SHI = FR - 72 mm	SHI = 1500 - 72 = 1428 mm
SHO = FR - 112 mm	SHO = FR - 112 = 1388 mm
GB = FR - 196 mm	GB = FR - 196 = 1304 mm
G = FR - 206 mm	G = FR - 206 = 1294 mm

Ultima 70

Dimenzije sa tolerancijom za varenje
Dimensions are without tolerance for melting

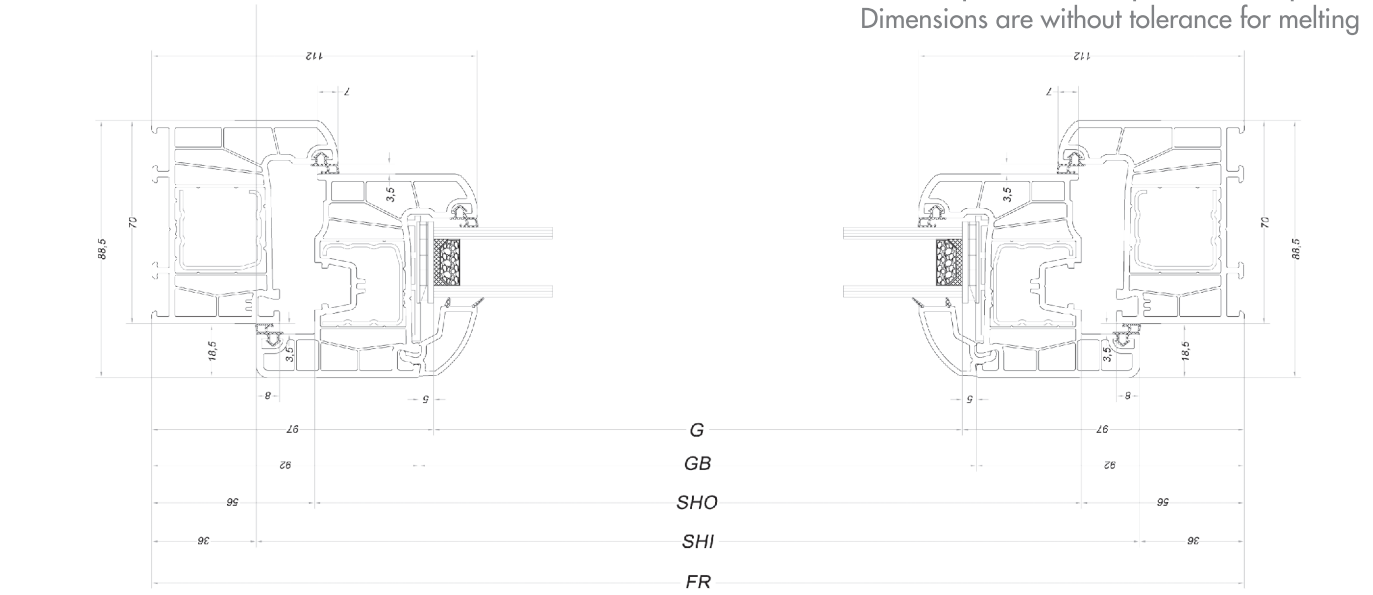

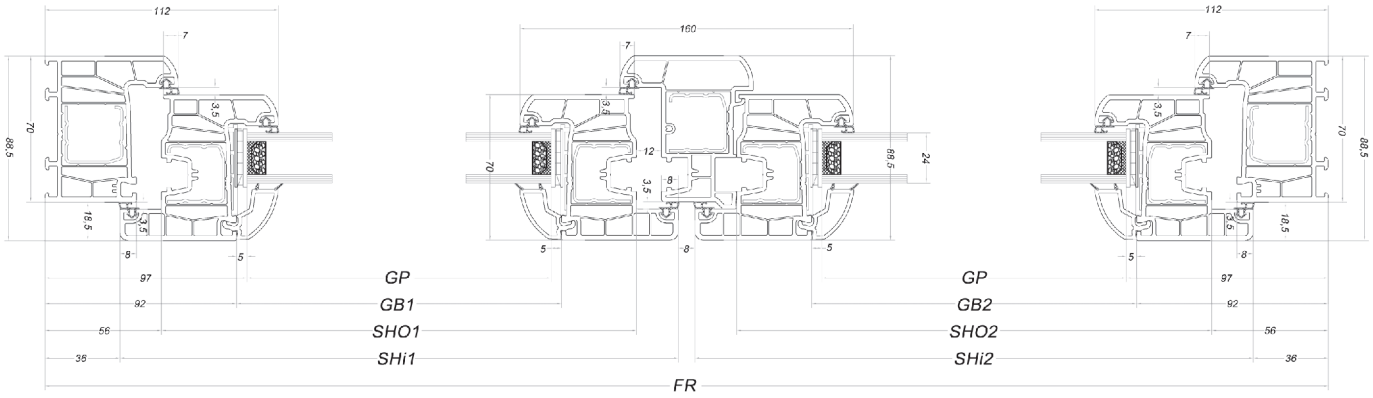

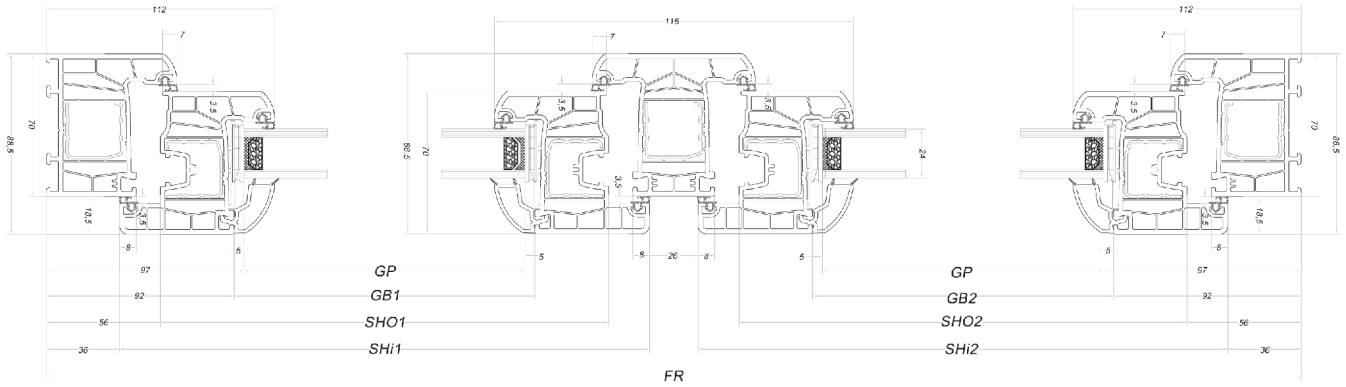

PROAL

Niš
tel: +381 18 4289 545
+381 18 4289 565

Užice
tel: +381 31 546 688
+381 62 320 500

Beograd
tel: +381 11 411 47 67
+381 62 218 500

Negotin
tel: +381 62 217 500
+381 63 216 500

info@proal.rs

